



ULTRAFRYER[®]

SYSTEMS



Model PAR-2/PAR-3 SC Gas Fryer

Operation Instructions



WARNING!!! TO PRECLUDE THE POSSIBILITY OF SPONTANEOUS COMBUSTIBLE FILTER TUB FIRES; SLUDGE AND CRUMBS MUST BE REMOVED AND DISCARDED AND THE FILTER TUB MUST BE THOROUGHLY CLEANED AFTER CLOSING THE STORE EACH NIGHT!!!

302 Spencer Lane • P.O. Box 5369

San Antonio, Texas 78201

(800) 525-8130 • (210) 731-5000 • Fax: (210) 731-5099

PREFACE

This manual was rewritten and published by the Technical Publications Department, Ultrafryer Systems, for use by personnel who operate an Ultrafryer Model SC Gas Fryer equipped with an Ultrastat 21 or Ultrastat 25 Cooking Computer.

**TECHNICAL PUBLICATIONS DEPARTMENT
ULTRAFRYER SYSTEMS
302 SPENCER LANE
SAN ANTONIO, TX 78201
1-800-545-9189 EXT. 5007**

NOTE: This manual is applicable to “Standard” Gas Models Par-2-SC / Par-3-SC Gas Fryers. It can be used as a guide in operating special variations of a Par-2-SC / Par-3-SC Gas Fryer. This Manual replaces Model SC Fryer Filtration Operation Manual 30A032 dated July 1999.

TABLE OF CONTENTS

	Page
GENERAL INFORMATION	
WARRANTY	2
SAFETY	3
DESCRIPTION / SPECIFICATION	3
INSTALLATION, INITIAL CLEANING, SHORTENING INSTALLATION, AND FRYER TEST START-UP	
INSTALLATION	5
GENERAL	5
UNPACKING	5
INSTALLING	5
LEVELING	7
INLET GAS REQUIREMENTS	8
GAS CONNECTION	9
ELECTRIC CONNECTION	9
INITIAL CLEANING	9
FRYER TEST START-UP	10
SHORTENING INSTALLATION	12
INLET GAS LINE SIZING TABLE	13
PREVENTIVE MAINTENANCE AND TROUBLE SHOOTING	
PREVENTIVE MAINTENANCE	16
TROUBLE SHOOTING	16
FRYER OPERATION	
GENERAL	19
FILTER TUB ASSEMBLY	20
ULTRASTAT 21 COOKING COMPUTER OPERATION	22
START-UP & COOKING	22
FILTERING SHORTENING	22
SHORTENING DISPOSAL & FRYER BOIL-OUT	25
ULTRASTAT 25 COOKING COMPUTER OPERATION	28
START-UP & COOKING	28
FILTERING SHORTENING	28
SHORTENING DISPOSAL & FRYER BOIL-OUT	32
INTERMEDIATE SEDIMENT FLUSH	35
CLEANING	37
SERVICE & PARTS	
TECHNICAL ASSISTANCE	41
ORDERING INFORMATION	41
PARTS IDENTIFICATION	41
WIRING DIAGRAM	53

GENERAL INFORMATION

ULTRAFRYER® LIMITED WARRANTY

Ultrafryer Systems warrants to the original purchaser of a gas or electric Ultrafryer® sold within the United States, its territories and Canada, that it will be free of defects in material and workmanship for the periods listed below:

STAINLESS STEEL FRYER VAT – Stainless Steel fryer vats are warranted for (10) ten years upon the terms hereinafter described. The (10) ten year warranty coverage applies ONLY to the Stainless Steel fryer vat and does not apply to the other components such as controls, fire boxes, gaskets, mounting hardware, or the heat shield weldment. The (10) ten year limited warranty coverage for the Stainless Steel fryer vats are as follows: (1) Vats that fail due to faulty workmanship or materials within the first twelve (12) months from the date of initial start up will be exchanged at no cost. Standard delivery ground freight will be prepaid by Ultrafryer **Systems for first year failures only**. The cost of labor to install the replacement vat will be covered by Ultrafryer Systems for vats, which fail within twelve (12) months from the date of initial start up. Labor for vat replacements after the first year is the responsibility of the owner.

(2) Vats that fail within the first (18) months will be exchanged at a cost not to exceed \$100.00 FOB San Antonio. (3) Vats that fail within the first (24) months will be exchanged at a cost not to exceed \$150.00 FOB San Antonio. (4) Vats that fail within the next (8) years will be exchanged at a cost not to exceed \$200.00 FOB San Antonio. (Subject to inflation adjusted in accordance with the C.P.I.). Proper credit issue for vat failures is contingent upon receipt, by Ultrafryer Systems, of the serial number identification tag for any failed vat.

ULTRAFRYER PARTS – All parts on the Ultrafryer® are covered for a period of one (1) year from the initial date of start up. This is to include computers, gas valves, switches, thermostats, etc. Ultrafryer Systems reserves the right to charge for certain parts such as computers, filter pumps and motors or any item over the amount of \$100.00 until Ultrafryer Systems receives the defective part back. After inspection, credit for the part will be issued to the purchaser provided the part is deemed defective and that defect is not the result of neglect or abuse by the user. The shortening filtration system, (hoses) are warranted for ninety (90) days from the initial date of start up.

PROCESSING WARRANTY CLAIMS – The equipment owner must promptly notify Ultrafryer Systems Warranty Department of any alleged defects as soon as they are discovered by calling 1-800-525-8130. After such notice, the Warranty Department will perform its obligation under this warranty within a commercially reasonable period of time. If alleged defects develop after normal business hours, on weekends or on holidays the owner must call Ultrafryer Systems first at the above number. This number is monitored 24 hours a day, 7 days a week. Ultrafryer Systems will notify an authorized service agent to make repairs during normal hours or after hours. Any parts that need to be shipped back to Ultrafryer Systems will be shipped back **prepaid by the customer** marked with the processing number and to the attention of the WARRANTY DEPARTMENT.

NON WARRANTY COVERAGE – This warranty does not include coverage for any consequential cost of damages including, but not limited to, any loss in store sales, spoiled food products, transportation, duty or custom cost. This warranty does not cover the Ultrafryer® exported to countries outside the United States and its territories. This warranty does not cover original installation and adjustments such as leveling, calibrations, electrical and gas connections, or problems due to faulty or contaminated gas supply. This warranty does not cover travel over 100 miles or 2 hours driving time from the location of the Ultrafryer® or overtime or holiday charges unless the Warranty Department granted prior approval. This warranty does not cover damage due to misuse, abuse, alteration or accident. This Warranty does not cover improper or unauthorized repair or installation, damage in shipment, normal maintenance items such as gaskets, hoses, and exterior finishes. **Ultrafryer Systems reserves the right to void component part warranty on any Ultrafryer® that is stored more than 6 (six) months after shipment from Ultrafryer Systems and not put into service.**

LABOR COVERAGE – The cost for labor to replace parts are covered for one (1) year after the initial start up. This warranty will include the labor involved in the six (6) month and the twelve (12) month fryer inspections recommended by the manufacturer for the first year after initial start up. **The Warranty Department must be promptly notified of any defects within the first year of operation.** The labor warranty does not include the cost to repair or clear dirty filter systems or perform any adjustments that would normally fall under the tasks associated with a proper start up and/or demonstration. **Labor is covered by Ultrafryer Systems for repairs by an AUTHORIZED service agent.** Owner is responsible for all costs associated with fryer installation and start up unless prior arrangements have been made with Ultrafryer Systems.

DISCLAIMER OF WARRANTIES

Other than as stated herein ULTRAFRYER SYSTEMS makes no warranty of any kind, express or implied, including but not limited to any warranty of merchantability of fitness for a particular purpose, including trade usage. Ultrafryer Systems sole obligation, and purchaser's sole remedy, under this warranty is repair or replacement, at the discretion of Ultrafryer Systems, of any part or component that proves to be defective in materials or workmanship. In no event shall Ultrafryer Systems be liable for consequential, incidental, or special loss or damages arising from the use of, or inability to use, the ULTRAFRYER®. This limited warranty is the only and complete statement with respect to warranties of NEW Ultrafryer® PAR-2, PAR-3 Gas and Electric ULTRAFRYERS® sold after March 1st, 2001. There are no other documents or oral statements for which Ultrafryer Systems will be responsible.

SAFETY

The major safety factor associated with the Ultrafryer PAR-2-SC / PAR-3-SC Gas Fryer is burns from hot shortening. In order to prevent serious burns, good housekeeping habits are required. The floor in front of and the area around the fryer should be kept clean and dry. Whenever anything is placed in to a fryer vat, care should be used not to splash the hot shortening. Product should always be “**PLACED**” into the shortening, not thrown. Safety goggles, neoprene insulated gloves and an apron must be worn while filtering or boiling-out a fryer vat. Electrical controls on all Ultrafryer Fryers operate on 120 volts single phase electrical power. No adjustments or replacement of electrical controls should ever be attempted without first disconnecting electrical power. The fryer should never be operated with wet hands or while standing in water. To do so can result in serious electrical shock or death.

The Ultrafryer Model Par-2-SC / Par-3-SC Gas Fryer is equipped with the following safety features: 1) High Limit Thermostat to shut off gas to the burners by opening a solenoid-actuated safety valve in the combination gas control valve. 2) Combination gas control valve which includes a built-in pressure regulator and manual valve. 3) Par-2-SC gas Fryers have a **CENTRIFICAL** switch and Model Par-3-SC Gas Fryers have an **AIR PRESSURE** switch to open the 24 volt electrical circuit to the Combination Gas Control Valve to turn the gas to the fryer **OFF**, should the Blower Motor fail. 4) Sensing circuit within the Spark Ignitor Module to turn the fryer **OFF** if a burner **FLAME-OUT** occurs. 5) A Drain Valve Safety Switch that will **DISABLE** the fryer each time the shortening drain valve is **OPENED**.

DESCRIPTION/SPECIFICATIONS

The Ultrafryer PAR-2-SC / PAR-3-SC Gas Fryer is constructed from 16 and 18 gauge, type 304 polished steel. Each of the five (5) sizes of fryers are equipped with: 1) a bottom pressure sweeper to remove debris from the vat; 2) improved filter tub containing a Crumb Catcher Pan, Sludge Catcher Pan and Screen and filter tub cover to minimize spills when removing the tub from the guide rails; and 3) a central Wash Down Hose female coupler located on the center vat along with a Time Control Shortening Wash Panel. In addition, an optional automatic vat cleaner and storage caddy beneath the right side can also be purchased. The dimensions of each size fryer is as follows:

A. PAR-2-SC

<u>ITEM DESCRIPTION</u>	PAR-2-18-SC in. (mm)	PAR-2-20-SC in. (mm)
Overall Width	19½” (495)	21½” (546)
Overall Depth	36¾” (933)	38¾” (984)
Work Height	36” (914)	36” (914)
Oil Capacity High Level Low Level	110 lbs (55 liters) 70 lbs (35 liters)	138 lbs (69 liters) --
Size Vat Container	18” x 18” (457 x 457)	20” x 20” (508 x 508)
Gas Rating Butane Gas Natural Gas Propane Gas	65,000 BTU/Hr (71.5 MJ/Hr.) 65,000 BTU/Hr (71.5 MJ/Hr.) 65,000 BTU/Hr (71.5 MJ/Hr.)	75,000 BTU/Hr (82.5 MJ/Hr.) 75,000 BTU/Hr (82.5 MJ/Hr.) 75,000 BTU/Hr (82.5 MJ/Hr.)
Shipping Cube	17.15 ft ³ (.48 m ³)	19.89 ft ³ (.56 m ³)
Shipping Weight	315 lbs (142 kgs)	325 lbs (146 kgs)
Electrical Requirements	120 VAC 6 Amps 60 Hz 1 Ø	120 VAC 6 Amps 60 Hz 1 Ø

B. PAR-3-SC

<u>ITEM DESCRIPTION</u>	PAR-3-14-SC in. (mm)	PAR-3-18-SC in. (mm)	PAR-3-20-SC in. (mm)
Overall Width	15½” (394)	19½” (495)	21½” (546)
Overall Depth	32¾” (832)	36¾” (933)	38¾” (984)
Work Height	36” (914)	36” (914)	36” (914)
Oil Capacity High Level Low Level	45 lbs (22.5 liters) 35 lbs (17.5 liters)	110 lbs (55 liters) 70 lbs (35 liters)	138 lbs (69 liters) --
Size Vat Container	14” x 14” (357 x 357)	18” x 18” (457 x 457)	20” x 20” (508 x 508)
Gas Rating Butane Gas Natural Gas Propane Gas	90,000 BTU/Hr (99 MJ/Hr.) 90,000 BTU/Hr (99 MJ/Hr.) 90,000 BTU/Hr (99 MJ/Hr.)	110,000 BTU/Hr (121 MJ/Hr.) 110,000 BTU/Hr (121 MJ/Hr.) 110,000 BTU/Hr (121 MJ/Hr.)	120,000 BTU/Hr (132 MJ/Hr.) 120,000 BTU/Hr (132 MJ/Hr.) 120,000 BTU/Hr (132 MJ/Hr.)
Shipping Cube	12.11 ft ³ (.34 m ³)	17.15 ft ³ (.48 m ³)	19.89 ft ³ (.56 m ³)
Shipping Weight	275 lbs (124 kgs)	315 lbs (142 kgs)	275 lbs (124 kgs)
Electrical Requirements	120 VAC 6 Amps 60 Hz 1 Ø	120 VAC 6 Amps 60 Hz 1 Ø	120 VAC 6 Amps 60 Hz 1 Ø

**INSTALLATION, INITIAL CLEANING, SHORTENING
INSTALLATION AND FRYER TEST START-UP**


INSTALLATION

GENERAL - Each Model SC Gas Fryers should be installed as follows:

1. Properly unpacked and positioned at its operating location within the store.
2. Placed beneath a properly designed exhaust hood and protected by a Fire Suppression System
3. **LEVELED** using a spirit level to assure each vat contains the proper amount of shortening.
4. Installed by a licensed electrician and plumber.
5. Connected to the type gas for which the unit was fabricated as shown on the rating plate.
6. Connected to the proper size pressure regulator installed in the gas supply line and adjusted to the proper manifold pressure.
7. Connected to the main gas supply line with the proper size gas line.
8. Restrained by use of a restraining device to avoid splashing hot liquid and to ensure tension cannot be placed on electrical or gas connections.

UNPACKING - Check that the container is upright. Use an outward prying motion. **DO NOT USE A HAMMER** to remove the wood braces and carton. Check the fryer bank for visible damage; if damage has occurred do not refuse shipment, but contact the carrier and file the appropriate freight claims. Remove the two shipping bolts in the front and rear legs and remove the two 2" x 6" (51mm x 152mm) wood supports.

INSTALLING - If sufficient clearance is available to roll the assembled fryer bank into the building, proceed to the paragraph below. In the event entrance doors are too narrow to roll the assembled fryer into the building; disassemble and reassemble the fryer as follows:

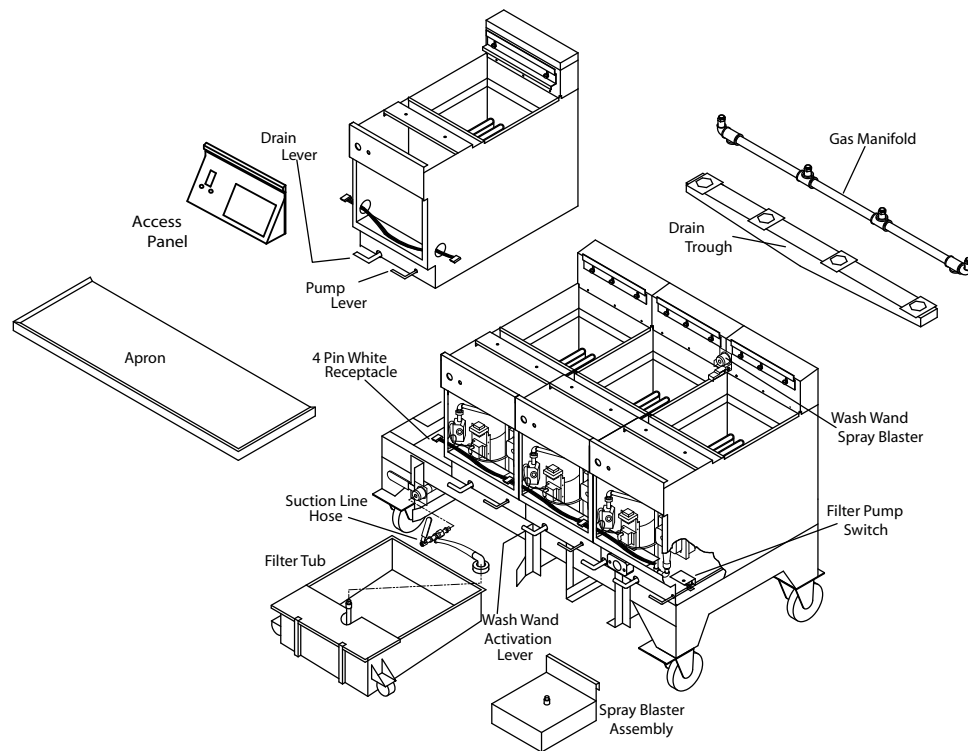

DIS-ASSEMBLY

- A. Perform the following steps facing the **FRONT** of the fryer:
1. Number each vat cabinet from **LEFT** to **RIGHT** and place these numbers on the front and rear panel of each cabinet.
 2. Lower the Temperature Control access panel from each vat cabinet.
 3. **CAREFULLY** remove the **APRON** from the fryer bank by removing the two (2) 1/4 - 20 wing nuts, 1/4" (6mm) split washers, and 1/16" (18mm) flat washers from each 1/4 - 20 weld stud beneath each cabinet hat section.

NOTE: It may be necessary to cut the **SILICONE SEAL** between the apron and vat cabinets to separate the apron.
DO NOT DAMAGE THE GASKET.

4. Remove the **JOINER STRIP** located between each set of vats; then cut the **SILICONE SEAL** between the vats.
5. **CAREFULLY** separate the **SHORTENING DRAIN TROUGH** from each 2" (51mm) ball valve plate by removing the four (4) 1/4 - 20 hex head bolts and nuts; then remove the drain trough from the fryer.

6. **CAREFULLY** disconnect the **4 PIN WHITE** connector from its mating receptacle located on the **LOWER** right hand end of each vat; then remove the **BLACK** wiring harness protector from the 2" (51mm) opening in each vat.
7. **CAREFULLY** disconnect the **ELECTRICAL OUTLET BOX BLACK** and **WHITE** electrical wires connected to wires by **WIRE NUTS** located on the **LEFT HAND** side of the "extreme" **RIGHT HAND** vat.
8. Remove the 10-24 truss head screw and nut on the right hand side of each vat used to secure adjoining vats and remove the 10-24 truss head screw and nut that secures the "extreme" left hand vat cabinet to the base frame.

B. Perform these steps facing the **REAR** of the fryer:

1. Remove the **REAR** panel from each vat by removing the four (4) pan head self-tapping screws.
2. Remove the two (2) 10-24 truss head screws and nuts on the right hand side of each vat used to secure adjoining vats.
3. **CAREFULLY** remove the two (2) philips head self-tapping screws along the **BOTTOM** flange of each cabinet.
4. **CAREFULLY** loosen and separate the flexible gas line from the gas manifold flare fitting on each vat, remove the ¼ - 20 hex head bolts and nuts from each manifold "**L**" **BRACKET**; then set the **GAS MANIFOLD** aside.
5. **CAREFULLY** disconnect the **SHORTENING LINE RED** and **WHITE** heater tape electrical wires terminated in a **3 PIN WHITE** connector from its mating receptacle located on the left hand side of the "extreme" **LEFT HAND** vat.

NOTE: BLACK and WHITE CABLETYES may have to be removed to separate connectors.

6. **CAREFULLY** disconnect the **FILTER PUMP MOTOR RED, GREEN** and **WHITE** electrical wires terminated in a **4 PIN WHITE** connector from its mating receptacle located on the left hand side of the "extreme" **LEFT HAND** vat.
7. **CAREFULLY** disconnect the **POWER LINE BLACK** and **WHITE** electrical wires terminated in a **4 PIN WHITE** connector from its mating receptacle located on the left hand side of the "extreme" **LEFT HAND** vat.
8. **SECURE** the **SHORTENING LINE** to the base frame on the **LEFT HAND** end of the fryer bank; then **CAREFULLY** loosen and separate the shortening line union attached to each ¾" (19mm) ball valve.
9. **CAREFULLY** remove each cabinet from the base frame, carry each cabinet into the building; then place the base frame into position in the kitchen.
10. **PRIOR** to re-assembling the fryer bank:
 - a. Remove **DRIED** silicone used to seal the apron to vats, opening between each set of vats, front and rear of each cabinet, lower edge of the two (2) end vats, and perimeter of the base frame.
 - b. **THOROUGHLY** clean the **TEFLON TAPE** from all **GAS** and **SHORTENING** fittings and pipes; then wrap all male pipes and fittings with new teflon tape.

RE-ASSEMBLY

A. Place each vat cabinet in numerical order in **FRONT** of the base frame from **LEFT** to **RIGHT**.

B. Install each vat cabinet on the base frame as follows:

1. Place a bead of silicone around the perimeter of the base frame for the **FIRST** vat cabinet.
2. **CAREFULLY** place **VAT CABINET #1** in position on the base frame; then secure the cabinet to the base frame by installing a 10-24 truss head screw and nut on the left hand flange to the base frame then install two (2) philips head self-tapping screws in the two holes on the **REAR** bottom flange of the cabinet.
3. Repeat the above procedures to install remaining vat cabinets on the base frame.

C. When all vat cabinets are installed on the base frame, secure the cabinets as follows:

1. Place a bead of silicone along the **FRONT, TOP** and **REAR** space between vat cabinets #1 and #2.
2. Install a 10-24 truss head screw and nut in the ¼" (6mm) holes on the **FRONT** right hand side of vat cabinet #1 and left hand side of vat cabinet #2.


3. Install two (2) 10-24 truss head screws and nuts in the two (2) $\frac{3}{16}$ " (5mm) holes on the **REAR** left hand side of vat cabinet #1 used to secure it to cabinet #2.
4. Repeat the above procedures to secure remaining vat cabinets to adjoining vat cabinets.

D. Perform these steps facing the **REAR** of the fryer:

1. **CAREFULLY** connect each shortening line union **HAND TIGHT**, remove the device used to secure the **SHORTENING LINE** to the **LEFT** end of the base frame; then **SECURELY** tighten each shortening line union.
2. Place the **GAS MANIFOLD** in position, secure each manifold "**L**" **BRACKET** to the frame using the $\frac{1}{4}$ -20 hex head bolts and nuts removed earlier; then **SECURELY** connect each manual gas valve flexible gas line to the male flare fitting on the manifold.
3. **SECURELY** connect the **SHORTENING LINE RED** and **WHITE** heater tape electrical wires terminated in a **3 PIN WHITE** connector to its mating receptacle on the left-hand side of the "extreme" **LEFT HAND** vat. Install a small cabletye on the connection to assure these connectors cannot be separated.
4. **SECURELY** connect the **FILTER PUMP MOTOR RED, GREEN** and **WHITE** electrical wires terminated in a **4 PIN WHITE** connector to its mating receptacle located on the left-hand side of the "extreme" **LEFT HAND** vat.
5. **SECURELY** connect the **POWER LINE BLACK** and **WHITE** electrical wires terminated in a **4 PIN WHITE** connector to its mating receptacle located on the left hand side of the "extreme" **LEFT HAND** vat.
6. Install a large cabletye on the cable harness on the "extreme" **LEFT** and **RIGHT** vats; then replace the **REAR PANEL** on each vat cabinet using eight (8) pan head self-tapping screws in each cabinet panel and fan cover.

E. Perform these steps facing the **FRONT** of the fryer:

1. Install the **BLACK** wiring harness protector in the 2" (51mm) opening of each vat; then **SECURELY** connect the **4 PIN WHITE** wiring harness connector to its mating receptacle on each vat.
2. **CAREFULLY** connect the **ELECTRICAL OUTLET** box **BLACK** and **WHITE** wires on the "extreme" right hand vat to the **POWER** line **BLACK** and **WHITE** wires using the wire nuts previously removed.
3. **CAREFULLY** position the drain trough beneath the fryer; then **SECURE** the drain trough to each 2" (5mm) ball valve plate using four (4) $\frac{1}{4}$ - 20 hex head bolts and nuts previously removed.
4. Remove any dried silicone from each **JOINER STRIP**, place a bead of silicone in each strip; then place the joiner strip over the edge of all adjoining fryer vats.
5. **CAREFULLY** replace the **APRON** as follows:
 - a. Remove any dried silicone from the front edge of each vat cabinet and the bottom of the **APRON**.
 - b. Place a bead of silicone along the **FRONT** edge of each vat cabinet and fill the **REAR** corners of the apron with silicone so it will be flush with the top of the apron.
 - c. Place the apron in position with the **REAR** flange towards the **FRONT** inside edge of each vat and the **FRONT** of the apron, elevated approximately 45 degrees; seat the rear flange of the apron over the front inside edge of each vat; then **CAREFULLY** lower the front of the apron until each $\frac{1}{4}$ - 20 weld stud is seated in the notches of the front and rear hat section of each cabinet. Slip the apron a little bit to the left and right to center it on the fryer.
 - d. When the apron is properly positioned, secure it to the hat sections of each cabinet using the wing nuts, split washers and the flat washers removed earlier.
 - e. After the apron has been secured to each fryer cabinet apply a small bead of multipurpose sealant to the areas shown to the right.
6. Replace the Temperature Control Access Panel.

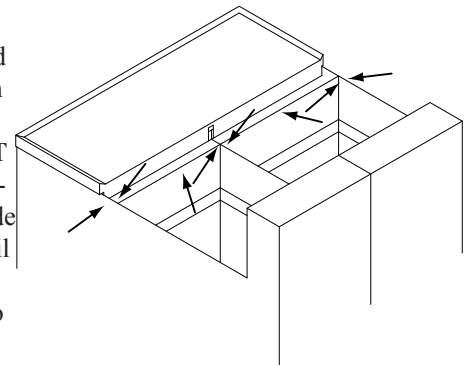

CAUTION: FAILURE TO SEAL THESE AREAS WILL PERMIT HOT SHORTENING TO BOIL UP INTO THE SPACE ALLOWING OIL TO SEEP INTO THE FIREBOX AREA.

LEVELING:


- A. Roll the fryer to its operating location and check to be sure it is level at this location. If not, loosen the casters and insert the appropriate number of shim plates between leg and caster plates then retighten the caster bolts.
- B. If the floor is smooth and level, adjust to the high corner and measure with a spirit level. If the floor is uneven or has a decided slope, level the unit with metal shims.

NOTE: A caster may not return exactly to the same position after being moved, which may require re-leveling after each move.

- C. Connect the gas manifold to the building gas supply line by means of a CSA International APPROVED flexible gas line as shown in the figure below.

NOTE: CONNECT-IT inc. 3/4" (19mm), 1" (25mm) and 1 1/4" (32mm) flexible gas hose 4 feet long (1219mm) with a quick disconnect coupling on one end is available from Ultrafryer Systems under part number 24-322 (3/4" (19mm) hose), 24-323 (1" (25mm) hose) and 24-456 (1 1/4" (32mm) hose). These hoses are equipped with a fusible link, which melts at **361°F (183°C)** that will **SHUT OFF** the gas supply when it melts. A restraining device 44" (1119mm) long is also available under part number 24-324.

CAUTION: THE BUILDING GAS SUPPLY LINE MUST BE SIZED TO PROVIDE THE VOLUME OF GAS REQUIRED FOR PROPER OPERATION AS EXPLAINED ON TABLE 1, page 13.

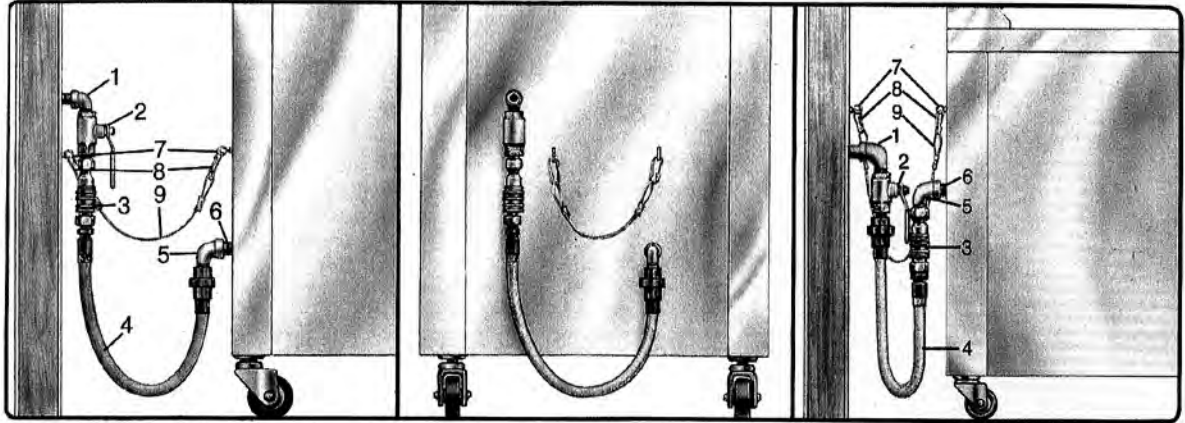

WARNING: THE RESTRAINT DEVICE (ITEM 9) MUST BE INSTALLED TO ASSURE TENSION CANNOT BE PLACED ON THE FLEXIBLE GAS LINE OR FITTING.

- | | |
|--------------------------------|------------------------------|
| 1. BUILDING GAS SERVICE LINE | 6. APPLIANCE MANIFOLD/NIPPLE |
| 2. MAIN GAS CUT-OFF VALVE | 7. EYELET FASTENERS |
| 3. CONNECT-IT QUICK-DISCONNECT | 8. SPRING HOOK |
| 4. FLEX-CON CONNECTOR | 9. RESTRAINING CHAIN |
| 5. ELBOW | |

**TYPICAL GAS CONNECTION
FIGURE 1**

INLET GAS REQUIREMENT

PERTINENT GAS DATA

FRYER TYPE	GAS TYPE	GAS VALVE H ₂ O COLUMN SETTING	ORIFICE HOLE SIZE	RATING		INLET GAS REQUIRED	
				BTU/HR	(MJOULES)	FT ³ /HR	(M ³ /HR)
PAR-2-18	Butane Gas	10.0" (254 mm) W.C.	#43	65,000	(71.5)	20.31	(.57)
	Natural Gas	4.0" (102 mm) W.C.	#25	65,000	(71.5)	61.9	(1.75)
	Propane Gas	10.0" (254 mm) W.C.	#42	65,000	(71.5)	26.00	(.74)
PAR-2-20	Butane Gas	10.0" (254 mm) W.C.	#40	75,000	(82.5)	23.44	(.80)
	Natural Gas	4.0" (102 mm) W.C.	#22	75,000	(82.5)	71.43	(2.02)
	Propane Gas	10.0" (254 mm) W.C.	#39	75,000	(82.5)	30.00	(.85)
PAR-3-14	Butane Gas	10.0" (254 mm) W.C.	#36	90,000	(99.0)	28.13	(.66)
	Natural Gas	4.0" (102 mm) W.C.	#16	90,000	(99.0)	85.71	(2.43)
	Propane Gas	10.0" (254 mm) W.C.	#32	90,000	(99.0)	36.00	(1.02)
PAR-3-18	Butane Gas	10.0" (254 mm) W.C.	#36	110,000	(121.0)	34.38	(.97)
	Natural Gas	4.0" (102 mm) W.C.	#10	110,000	(121.0)	104.76	(2.96)
	Propane Gas	10.0" (254 mm) W.C.	#32	110,000	(121.0)	44.00	(1.25)
PAR-3-20	Butane Gas	10.0" (254 mm) W.C.	#30	120,000	(132.0)	37.50	(1.06)
	Natural Gas	4.0" (102 mm) W.C.	#07	120,000	(132.0)	114.29	(3.23)
	Propane Gas	10.0" (254 mm) W.C.	#28	120,000	(132.0)	48.00	(1.36)

FT³/HR (M³/HR) Values may vary due to heating value and specific gravity of gas supplied by local companies.

GAS CONNECTION: The gas supply (service) line must be the same size or greater than the inlet line of the appliance. **THE GAS SUPPLY LINES MUST BE SIZED TO ACCOMMODATE ALL THE GAS FIRED EQUIPMENT THAT MAY BE CONNECTED TO THAT SUPPLY.** Refer to Table 1 (page 13) and consult your contractor, gas company or supplier, or other cognizant authorities.

NOTE: Sealant used on all pipe joints must be resistive to butane and propane gas.

- A. Manual shut off valve: This supplier-installed valve must be installed in the gas service line ahead of the appliance and in a position where it can be reached quickly in the event of an emergency.
- B. Pressure regulator: All commercial cooking equipment must have a pressure regulator on the incoming service line for safe and efficient operation, because service pressure may fluctuate with local demand. External regulators are not required on this fryer, as that function is performed by a combination gas control valve, however if the incoming pressure is in excess of ½ psig, a step-down regulator will be required.
- C. Natural gas: Natural gas fryers require 7” (178mm) water column (W.C.) “inlet” pressure to the fryer’s combination gas control valve for proper operation, when all gas units are operating simultaneously. Butane and Propane gas fryers require 14” (356mm) water column (W.C.) “inlet” pressure to the fryer’s combination gas control valve for proper operation, when all gas units are operating simultaneously. This “inlet” pressure **MUST** be checked with a manometer **PROIR** to placing the fryer in operation.

WARNING: IF THE “INLET” GAS PRESSURE AT THE FRYER’S COMBINATION GAS CONTROL VALVE “EXCEEDS” ½ lb/in² (.035 kg/cm²) OR APPROXIMATELY 14” (356 mm) W.C., AN EXTERNAL REGULATOR MAY BE NEEDED TO PREVENT DAMAGE TO THE COMBINATION GAS VALVE, AND VOIDING OF WARRANTY. FAILURE TO ADDRESS THIS COULD RESULT IN EXPLOSION OR FIRE..

- D. Combination gas control valve: The correct combination gas control valve and orifice is installed at the factory for BUTANE, NATURAL and PROPANE units based on each Purchase Order. This valve should be CHECKED/ADJUSTED by qualified service personnel using proper test equipment for the following “OUTLET” gas pressure PRIOR to start-up of a fryer.
NATURAL GAS FRYERS 4” (102mm) W.C. BUTANE/PROPANE FRYERS 10” (254mm) W.C.
- E. Rigid connections: Check any installer-supplied intake pipe(s) visually and/or blow them out with compressed air to clear dirt particles, threading chips or any other foreign matter before connecting to the service line as these particles may clog the orifice when gas pressure is applied. All connections must be tested with a soapy solution before lighting the fryer.
DO NOT USE AN OPEN FLAME TO CHECK FOR LEAKS! Putting an open flame beside a new connection is not only dangerous, but will often miss small leaks that a soapy solution would find.
- F. Flexible Couplings, Connectors: The installation is to be made with a connector that (1) complies with the Standard for Connectors for Movable Gas Appliances, ANSI Z21.69 (CAN/CGA-6.16), and a quick-disconnect device that complies with the Standard for Quick-Disconnect Devices for Use With Gas Fuel, ANSI Z21.41 (CAN1-6.9) (2) adequate means must be provided to limit the movement of the appliance without depending on the connector and the quick disconnect device or its associated piping to limit the appliance movement and (3) the location(s) where the restraining means may be attached to the appliance shall be specified. **DOMESTIC CONNECTORS ARE NOT SUITABLE!!!**
- G. Fryer Service: The fryer is equipped with swivel casters. To service the fryer:
 - 1. Turn “OFF” gas supply at the supply source.
 - 2. Disconnect the flexible gas line quick-disconnect
 - 3. Disconnect restraint means and roll fryer out for rear service access.
 - 4. When the fryer is re-positioned, be sure to reconnect the restraint and level the fryer.


ELECTRICAL CONNECTION: The **MAXIMUM** current draw per vat at Initial Start-ip or during a Warm-up Cycle will be 3 Amperes at 120 Volts. When running the Filter System simultaneously allow for an additional 3 Amperes. Refer to the wiring diagram attached to the front door of the fryer for internal electrical connections.

INITIAL CLEANING

New Gas Fryers are wiped clean with solvents at the factory to remove any visible signs of dirt, oil, grease, etc., remaining from the manufacturing process; then given a light coat of oil. Each fryer and filter tub assembly should be **THOROUGHLY** washed with **HOT** sanitizer solution to remove film residue, installation dust or debris and then wiped d4ry prior to placing the fryer into operation.


FRYER TEST START-UP

A. TO TEST OPERATE an Ultrafryer Gas Fryer equipped with an Ultrastat 21 Cooking Computer:

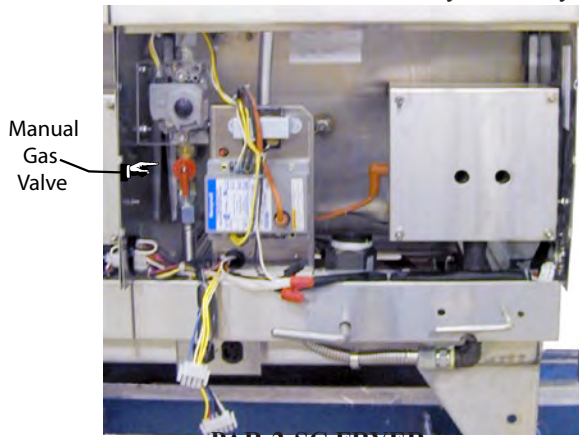

PAR-2-SC FRYER


Manual Gas Valve

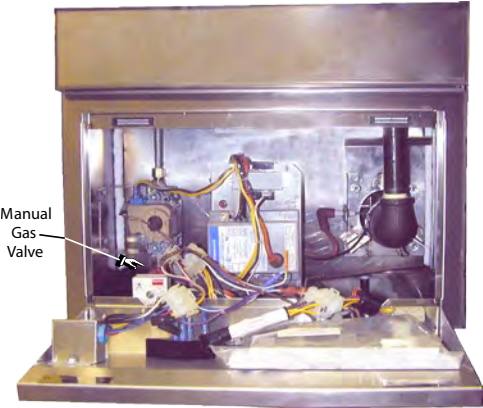

PAR-3-SC FRYER

Manual Gas Valve

1. Ensure the fryer's power ON/OFF Switch is in the OFF position.
2. Fill the fryer vat with hot or cold water to the middle of the "E<--" in the word **LEVEL** of the applicable shortening level mark on the rear of the vat.
3. Turn the **MANUAL** gas valve to the **OFF** position and wait **FIVE (5)** minutes for any accumulation of gas to disperse.
4. **ENSURE** the **MAIN** gas shut-off valve is in the **ON** position, and that the **EXHAUST FAN** is **ON**.
5. Turn the **MANUAL GAS VALVE** to the **ON** position.
6. Perform the following steps, in the order listed:

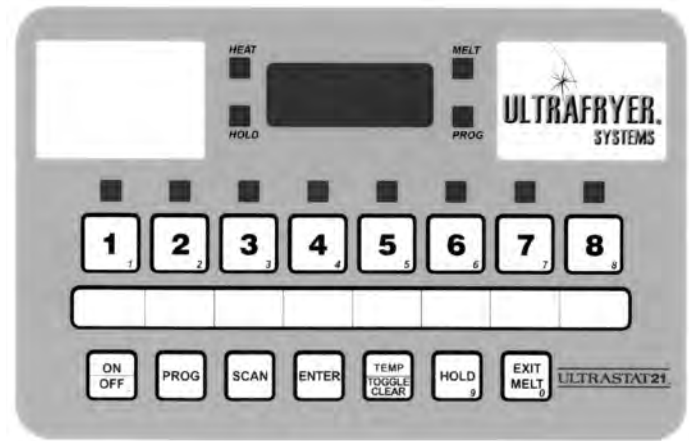


<u>STEP</u>	<u>ACTION</u>	<u>RESPONSE</u>
1	ENSURE the drain lever on the fryer is in the CLOSED position, water is at the proper level, then turn the fryer TOGGLE ON/OFF switch to the ON position.	A. The AMBER Power lamp beside the TOGGLE ON/OFF switch will LIGHT .


CAUTION: PRIOR TO PROCEEDING TO STEP 2 VISUALLY CHECK THAT THE HEAT MECHANISM IS COVERED WITH AT LEAST 2" (51 mm) OF WATER.

2	Turn the Computer ON by depressing the computer ON/OFF button; then place the computer in the BOIL MODE by pressing the computer keys in the following order: PROG , 1 , 7 , 3 , 3 , ENTER .	A. BOIL will appear in the computer display. B. The HEAT lamp on the computer and the RED heat mechanism indicator lamp on the fryer will cycle ON and OFF indicating the heat mechanism is periodically being turned ON and OFF to gently heat the water to 190°F (88°C) .
3	When the water begins to BOIL , press the following computer keys in the order shown to EXIT the BOIL MODE : PROG , 1 , 7 , 3 , 3 , ENTER .	A. LO will appear in the computer display. B. The HEAT lamp on the computer will turn OFF . C. The MELT lamp on the computer will LIGHT .
4	Turn the computer OFF by depressing the ON/OFF button; then turn the fryer Toggle ON/OFF switch to the OFF position.	A. The computer display will go BLANK . B. The AMBER POWER lamp will turn OFF .
5	After the water in the vat and metal surfaces of the fryer has COOLED , drain the water into a floor drain.	

B. TO TEST OPERATE an Ultrafryer Gas Fryer equipped with an Ultrastat 25 Cooking Computer:

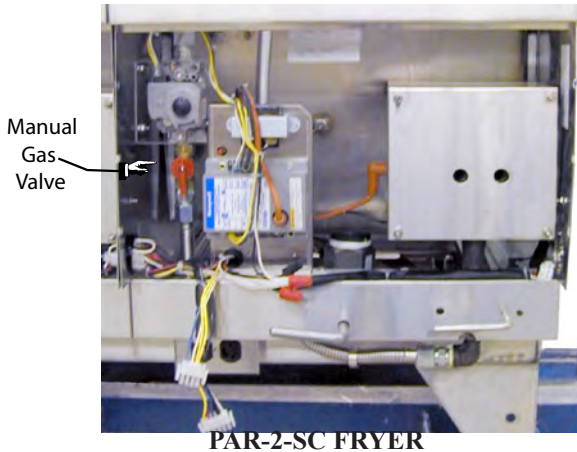

PAR-2-SC FRYER

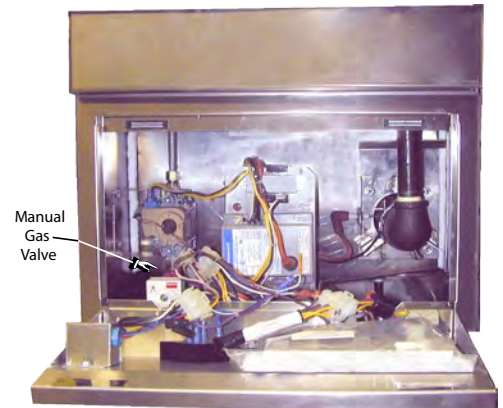



PAR-3-SC FRYER

1. Ensure the fryer's power ON/OFF Switch is in the OFF position.
2. Fill the fryer vat with hot or cold water to the middle of the "E ←" in the word **LEVEL** of the applicable shortening level mark on the rear of the vat.
3. Turn the **MANUAL** gas valve to the **OFF** position and wait **FIVE (5)** minutes for any accumulation of gas to disperse.
4. **ENSURE** the **MAIN** gas shut-off valve is in the **ON** position, and that the **EXHAUST FAN** is **ON**.
5. Turn the **MANUAL GAS VALVE** to the **ON** position.
6. Perform the following steps, in the order listed:



<u>STEP</u>	<u>ACTION</u>	<u>RESPONSE</u>
1	Ensure the drain valve lever is in the closed position and that water is at the proper level; then turn the Toggle ON/OFF switch to the ON position.	The AMBER power lamp beside the Fryer Toggle ON/OFF switch will LIGHT .

CAUTION: PRIOR TO PROCEEDING TO STEP 2, VISUALLY CHECK THAT THE HEAT EXCHANGER TUBES ARE COVERED BY AT LEAST 2" (51mm) OF WATER.

2	Turn the computer ON by depressing the computer ON/OFF key; then place the computer in the BOIL MODE by pressing the computer keys below in that order: 	A. BOIL 30:00 will appear in the computer display. B. The HEAT DEMAND LED on the computer and the RED indicator lamp on the fryer will cycle ON and OFF to heat the water to 192°F (89°C) .
3	When water begins to BOIL , press the computer  key to exit the Boil Mode.	A. The Computer Display will go BLANK .
4	Turn the Fryer Toggle ON/OFF switch to the OFF position.	A. The AMBER power lamp will turn OFF .
5	After the water in the vat and metal surfaces of the fryer has COOLED , drain the water into a floor drain.	

SHORTENING INSTALLATION

- A. LIQUID SHORTENING:** When using liquid shortening (cooking oil) fill the fryer with shortening even with the middle line of the **E <** in the word **LEVEL** of the applicable shortening level mark on the rear wall of the fryer.
- B. SOLID SHORTENING:**
- 1) Cut a block of solid shortening into small pieces.
 - 2) Place small pieces of solid shortening **EVENLY** on top of the **HEAT MECHANISM** and **THOROUGHLY PACK** these pieces of solid shortening between, below and above the **HEAT MECHANISM**.
While packing solid shortening is messy and time consuming, it is the safest and fastest way to melt solid shortening.
 - 3) UltraStat 21 equipped Fryer
 - a) Turn the fryer Toggle ON/OFF switch **ON**; then place the computer in the **SHORTENING MELT MODE** by depressing the ON/OFF button. The **MELT** lamp will **LIGHT** to indicate the computer is in the **SHORTENING MELT MODE**; and the **HEAT** lamp and **RED** heat mechanism indicator lamp on the fryer will cycle **ON** and **OFF** indicating the heat mechanism is periodically being turned **ON** and **OFF** to gently heat the shortening.
 - b) When the heat mechanism is **COMPLETELY** covered with **LIQUID** shortening and the shortening is **ABOVE** the Melt Limit Temperature, replace the grill in the fryer vat; then push the **EXIT MELT** button on the computer. Proceed to Paragraph B 5) below.
 - 4) UltraStat 25 equipped Fryer
 - a) Turn the fryer Toggle ON/OFF switch **ON**; then place the computer in the **SHORTENING MELT MODE** by depressing the ON/OFF key. **MELT E, G, or P** will appear in the computer display indicating the computer is in the **SHORTENING MELT MODE**; and the **HEAT DEMAND LED'S** on the computer and the fryer's **RED INDICATOR LAMP** will cycle ON and OFF indicating the heat mechanism is periodically being turned **ON** and **OFF** to gently heat the shortening.
 - b) When the heat mechanism is **COMPLETELY** covered with **LIQUID** shortening and the shortening is **ABOVE** the Melt Release Temperature, replace the grill in the fryer vat; then push the **OK/EXIT** key on the computer.
 - 5) Continue adding solid shortening as follows:
 - a) Place small pieces of solid shortening into a fry basket.
 - b) **CAREFULLY** lower the basket into the fryer vat.
 - c) **GENTLY** turn the basket to allow these pieces of solid shortening to float away.
 - d) Repeat the above steps until liquid shortening is even with the middle line of the "**E <**" in the word **LEVEL** of the applicable shortening level mark on the rear wall of the fryer vat.

WARNING!!! TO AVOID INJURY

- I DO NOT MOVE A FRYER FILLED WITH HOT LIQUID.**
- II ON GAS FRYERS -- DO NOT GO NEAR THE AREA DIRECTLY OVER THE FLUE OUTLET WHEN THE FRYER'S MAIN BURNERS ARE OPERATING.**
- III ALWAYS WEAR OIL-PROOF, INSULATED GLOVES WHEN WORKING WITH A FRYER FILLED WITH HOT OIL.**
- IV ALWAYS DRAIN HOT OIL INTO A METAL TUB, POT OR CAN ... HOT OIL CAN MELT PLASTIC BUCKETS OR SHATTER GLASS.**

INLET GAS LINE SIZING - The Table below is to be utilized to calculate the size (diameter) of the inlet gas line from the building regulator to the fryer manifold.

INLET GAS LINE REQUIREMENTS									
PIPE LENGTH	PIPE DIAMETERS (inches & (mm equivalents)) Maximum Allowable Flow (Shown in ft ³ /hr (M ³ /hr))								
	Feet (Meters)	½" (13 mm)	¾" (19mm)	1" (25mm)	1¼" (32mm)	1½" (38mm)	2" (51mm)	2½" (64mm)	3" (76mm)
15 (4.6)	62 (1.7)	108 (4.7)	350 (9.8)	620 (17.4)	960 (26.9)	2,000 (56.0)	3,500 (98.0)	5,400 (151.2)	11,200 (313.6)
30 (9.1)	43 (1.2)	120 (3.4)	245 (6.9)	430 (12.0)	680 (19.0)	1,400 (39.2)	2,450 (68.6)	3,800 (106.4)	7,900 (221.2)
45 (13.7)	35 (1.0)	98 (2.7)	200 (5.6)	355 (9.9)	530 (14.8)	1,150 (32.2)	2,000 (56.0)	3,200 (89.6)	7,900 (182.0)
60 (18.3)	30 (0.8)	84 (2.4)	175 (4.9)	310 (8.7)	480 (13.4)	1,000 (28.0)	1,760 (49.3)	2,700 (75.6)	5,600 (156.8)
75 (22.9)	27 (0.8)	76 (2.1)	155 (4.3)	275 (7.7)	430 (12.0)	890 (24.9)	1,560 (43.7)	2,450 (68.6)	5,000 (140.0)
90 (27.4)	25 (0.7)	70 (2.0)	145 (4.1)	250 (7.0)	395 (11.1)	810 (22.7)	1,430 (40.0)	2,260 (63.3)	4,550 (127.4)
105 (32.0)	23 (0.6)	64 (1.8)	132 (3.7)	232 (6.5)	370 (10.4)	750 (21.0)	1,300 (36.4)	2,100 (58.8)	4,200 (117.6)
120 (36.6)	21 (0.6)	60 (1.7)	125 (3.5)	215 (6.0)	340 (9.5)	700 (19.6)	1,200 (33.6)	1,950 (54.6)	4,000 (112.0)
150 (45.7)	19 (0.5)	54 (1.5)	110 (3.1)	195 (5.5)	310 (8.7)	630 (17.6)	1,080 (30.2)	1,750 (49.0)	3,550 (99.4)
180 (54.9)	17 (0.5)	49 (1.4)	100 (2.8)	175 (4.9)	280 (7.8)	570 (16.0)	960 (26.9)	1,600 (44.8)	3,200 (89.6)
210 (64.0)	16 (0.4)	44 (1.2)	94 (2.6)	165 (4.6)	260 (7.3)	530 (14.8)	890 (24.9)	1,450 (40.6)	3,000 (84.0)
240 (73.2)	15 (0.4)	43 (1.2)	88 (2.5)	155 (4.3)	240 (6.7)	500 (14.0)	840 (23.5)	1,350 (37.8)	2,800 (78.4)
270 (82.3)	14 (0.4)	40 (1.1)	83 (2.3)	145 (4.1)	230 (6.4)	470 (13.2)	780 (21.8)	1,300 (36.4)	2,650 (74.2)
300 (91.4)	14 (0.4)	38 (1.1)	79 (2.2)	138 (3.9)	215 (6.0)	440 (12.3)	750 (21.0)	1,250 (35.0)	2,500 (70.0)
450 (137.2)	11 (0.3)	31 (0.9)	64 (1.8)	112 (3.1)	176 (4.9)	360 (10.1)	630 (17.6)	1,000 (28.0)	2,050 (57.4)
600 (182.9)	10 (0.3)	27 (0.8)	56 (1.6)	97 (2.7)	152 (4.3)	315 (8.8)	530 (14.8)	860 (24.1)	1,750 (49.0)

NOTE: 1) FT³/HR (M³/HR) values may vary due to heating value and specific gravity of gas supplied by local companies.
2) To determine the inlet gas line diameter for the distance between the fryer and main gas regulator, locate the FT³/HR (M³/HR) of gas required for the fryer and pipe length and read the pipe diameter on the top row. For example: a bank of fryers containing three (3) Par-2-20 Fryers, one (1) Par-2-18 Fryer and one (1) Par-3-14 fryer operating on Natural gas requires 361.90 FT³/HR (10.24 M³/HR) ((3x71.43 (2.02))+61.90 (1.75))+85.71 (2.43)). If the fryer bank is located 60 feet from the building gas regulator, a 1½" (38mm) diameter gas line **MUST** be installed between the manifold and regulator.

**TABLE 1
INLET GAS LINE SIZING**

INLET GAS REQUIREMENTS MODEL PAR-2/PAR-3 GAS FRYERS										
VAT SIZE			GAS TYPE	GAS VALVE SETTING (WC)		ORIFICE HOLE SIZE	RATING		INLET GAS REQ'D	
PAR	IN	MM		IN	MM		BTU/HR	MJ/HR	FT ³ /HR	M ³ /HR
2	18"	(457)	Butane	10.0	(254)	#43	65,000	(71.5)	20.31	(0.57)
			Natural	4.0	(102)	#25	65,000	(71.5)	61.90	(1.75)
			Propane	10.0	(254)	#42	65,000	(71.5)	26.00	(0.74)
2	20"	(508)	Butane	10.0	(254)	#40	75,000	(82.5)	23.44	(0.66)
			Natural	4.0	(102)	#22	75,000	(82.5)	71.43	(2.02)
			Propane	10.0	(254)	#39	75,000	(82.5)	30.00	(0.85)
3	14"	(356)	Butane	10.0	(254)	#36	90,000	(99.0)	28.13	(0.80)
			Natural	4.0	(102)	#16	90,000	(99.0)	85.71	(2.43)
			Propane	10.0	(254)	#32	90,000	(99.0)	36.00	(1.02)
3	18"	(457)	Butane	10.0	(254)	#36	110,000	(121.0)	34.38	(0.97)
			Natural	4.0	(102)	#10	110,000	(121.0)	104.76	(2.96)
			Propane	10.0	(254)	#32	110,000	(121.0)	44.00	(1.25)
3	20"	(508)	Butane	10.0	(254)	#30	120,000	(132.0)	37.50	(1.06)
			Natural	4.0	(102)	#7	120,000	(132.0)	114.29	(3.23)
			Propane	10.0	(254)	#28	120,000	(132.0)	48.00	(1.36)

NOTE: 1) The flexible gas line used to connect the gas manifold to the building gas supply line must be rated for the BTU/Hr (MJ/Hr) for the Fryer.
For example: the BTU/Hr (MJ/Hr) rating for a bank of fryers containing three (3) Par-2-20 fryers, one (1) Par-2-18 fryer and one (1) Par-3-14 fryer is rated at 380,000 BTU/Hr (418 MJ/Hr) ((3 x 75,000 (82.5))+65,000 (71.5)+90,000 (99)).

The Flexible Gas Line used to connect the gas distribution manifold to the fryer must be rated for the BTU/Hr (MJ/Hr) designated for the Fryer. Flexible gas lines and their ratings stocked by Ultrafryer Systems are listed below:

FLEXIBLE GAS LINES STOCKED BY ULTRAFRYER SYSTEMS			
PART NUMBER	DESCRIPTION	RATING	
		BTU/HR	(MJ/HR)
24-322	3/4" (19mm) Diameter Flexible Gas Line (w/quick connect couplings) 48" (1219mm) long. Connect-It SSGC75-48-UCQ	225,000	(281)
24-323	1" (25mm) Diameter Flexible Gas Line (w/quick connect couplings) 48" (1219mm) long. Connect-It SSGC100-48-UCQ	435,000	(479)
24-323	1 1/4" (32mm) Diameter Flexible Gas Line (w/quick connect couplings) 48" (1219mm) long. Connect-It SSGC125-48-UCQ	875,000	(479)

**PREVENTIVE MAINTENANCE
AND TROUBLESHOOTING**

PREVENTIVE MAINTENANCE

Minimal maintenance is required on a fryer because of its design and materials used in manufacture. However, some preventive maintenance and inspection must be performed periodically to prevent break downs which could curtail food sales. Any preventive maintenance or inspection should be accomplished with **CAUTION** while the fryer is in operation since **HOT** liquid shortening could cause severe burns. If service or repair is required, all gas and/or electrical power **MUST BE TURNED OFF PRIOR TO** performing that service or repair.

PREVENTIVE MAINTENANCE SCHEDULE

<u>ITEM</u>	<u>DAILY</u>	<u>INSPECT FOR:</u>
Grease Filters		Clean grease filters in the exhaust hood each evening and allow them to dry overnight.
Filter Tub		Thoroughly clean the filter tub assembly as perscribed in page 37 of the Cleaning Section of this manual. ENSURE THE WASH DOWN HOSE IS HUNG IN AN UPRIGHT POSITION (BY ONE END) SO SHORTENING CAN DRAIN INTO A CONTAINER!
<u>WEEKLY</u>		
Drain/Pump Levers		Determine that the drain and pump levers are securely attached to the drain and pump valves, and that the valve can be opened and closed.
Drain Hoses		Inspect the suction line hose, wash down hose and if applicable the shortening disposal hose for any evidence of deterioration.
Plumbing Heat Tape Insulation		Ensure that insulation and electric heat tape wrapped around the plumbing directly behind the drain trough has not been damaged.
Temperature Sensing Probes		During boil-out of the fryer, inspect the temperature and high limit sensing probes for any visual damage.

TROUBLESHOOTING

- A. GENERAL:** The problems and possible solutions listed in the troubleshooting chart below are typical Problems that are frequently encountered. **ONLY** qualified repairmen are to use the troubleshooting chart to repair this fryer. In the event a main burner malfunction occurs, perform the following checks **PRIOR** to contacting a repairman:
1. Ensure Gas Valves and/or high voltage circuit breakers are in their proper position.
 2. Check that the fryer electrical plug is connected to an electrical receptacle.
 3. Ensure the applicable Circuit Breaker is in the **ON** position and that the Toggle ON/OFF Switch is in the **ON** position, and computer is "Powering Up".
 4. If applicable ensure the gas supply line quick-disconnect coupling is **SEATED** on the gas manifold fitting.
 5. If applicable determine that the blower is operating.
- B TROUBLESHOOTING CHART:** Should a problem occur that cannot be corrected after performing the above **CHECKS**, contact an authorized repairman and/or Ultrafryer Systems Customer Service at 1-800-525-8130 and provide the information acquired while performing these checks.

CAUTION: ENSURE REPAIRMEN ARE ADVISED THAT FRYER RESTRAINTS MUST BE DISCONNECTED/ CONNECTED IF A FRYER IS TO BE MOVED DURING MAINTENANCE OR REPAIR AND THAT ELECTRICAL POWER AND/OR GAS MUST BE TURNED OFF PRIOR TO PERFORMING ANY MAINTENANCE OR REPAIR.

TROUBLE SHOOTING CHART


PROBLEMS		POSSIBLE SOLUTIONS
General		
A	The Filter Pump Motor fails to operate when the Pump Lever is placed in the OPEN position and the Toggle ON/OFF Switch is in the OFF position.	1 Insure the filter pump micro-switch is operational, then check the manual reset button on the filter pump motor. WARNING!!! TURN THE PUMP LEVER HANDLE TO THE CLOSED POSITION PRIOR TO DEPRESSING THE RESET BUTTON. FAILURE TO PLACE THIS HANDLE IN THE CLOSED POSITION COULD RESULT IN SEVERE BURNS FROM HOT COOKING OIL! 2 If the filter pump motor fails to operate after the reset button has been depressed, repair or replace the motor.
B	Decreased shortening flow rate while filtering.	1 Check for excessive sediment on the filter screen, standpipe suction fitting or in filter tub.
C	Pump / Motor operates but does not pump shortening.	1 Check for congealed shortening in the shortening system. 2 Check that the Standpipe is seated in the Knurl Knob. 3 Check for loose Standpipe / Suction Line Coupler connection.
D	Pump / Motor hums but will not pump shortening.	1 Check for congealed shortening in the pump or in shortening plumbing.

Gas Fryer

A	Main burner will not ignite. Blower is operating; but gas is not present at the burner.	1 Check the Blower Motor air pressure Switch by temporarily disconnecting the two (2) ORANGE blower motor wires and connecting them together. If the IGNITOR sparks when these wires are connected, the air pressure switch is defective and it will have to be replaced. 2 Check the following components in order, and replace if found to be defective: Transformer Gas Control Valve Hi-Limit Switch
B	Electrical power is present at the fryer, but the Blower is not operating.	1 Check for electrical power IN and OUT of the Blower Relay. 2 Blower Motor may have over-heated and shut-off on thermal overload. If this situation did occur, it will correct itself when the motor cools (10-20 minutes). If this overheating problem persists, replace the blower motor.
C	Excessive time is required to raise the shortening to cooking temperature. Temperature recovery is slow and main burner flames are small and appear to be lethargic	1 Ensure that the MANUAL GAS VALVE is completely open. 2 Check for an obstruction in the gas line inlet . 3 Check for an obstruction in the flue pipe. 4 Check that the ORFICE PLUG has the correct drill size opening. 5 Check for damaged BLOWER MOTOR fins. 6 Use a standard water-type U-gauge Manometoer to check the pressure at the gas control valve pressure tap. Proper gas pressure is shown below: Type Gas Gas Valve Setting . Butane Gas 10.0" (254mm) Natural Gas 4.0" (102mm) Propane Gas 10.0" (254mm) 7 If necessary remove the Pressure Regulator Adjustment cover and adjust this control to the proper pressure. (Turn adjusting screw CLOCKWISE to increase gas pressure to the burner and COUNTER CLOCKWISE to decrease gas pressure. Replace adjustment cover.)
D	Shortening temperature is too high and breaks down quickly.	1 Check the gas pressure as described above.

FRYER OPERATION

GENERAL - The filtration system of a Model SC Gas Fryer consist of an Automatic Vat Cleaner (AVC), referred to as a “Spray Blaster”, and an AVC storage caddy beneath the right side of the fryer. Features unique to Model SC fryers consist of the following:

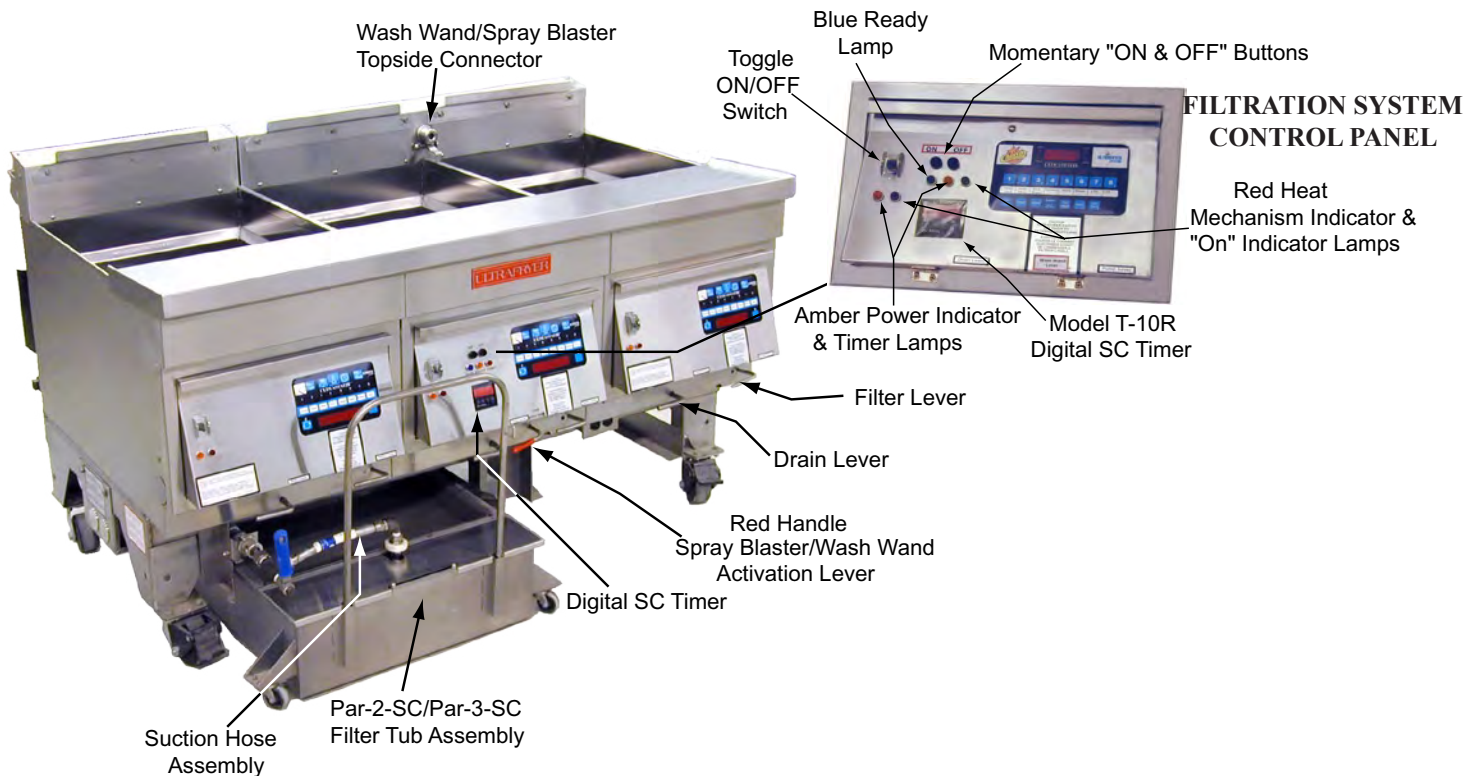


A. **FILTRATION SYSTEM CONTROL PANEL** - This assembly consist of an “OPTIONAL” **DIGITAL SC TIMER**; a momentary **ON** button switch and a momentary **OFF** button switch; and a **BLUE, AMBER, and RED** snaplight. The **BLUE** “OPEN” lamp **LIGHTS** when the red handle **WASH WAND LEVER** is turned to the **DOWN (ON)** position; the **AMBER** “READY” lamp **LIGHTS** when the momentary **ON** button switch is depressed; and the **RED** “PUMP” lamp **LIGHTS** when the **ON** button on the Control Panel and/or Digital Timer is depressed.

NOTE: Filtration Systems **WITHOUT** a **DIGITAL SC TIMER** uses the Ultrastat 21 Cooking Computer for the “timer”.


B. **RED HANDLE SPRAY BLASTER/WASH WAND ACTIVATION LEVER** - When the **RED** handle Spray Blaster/Wash Wand Activation Lever is in the **UP (OFF)** position, shortening in the filter tub will be returned to a vat through the **SPRAY SWEEPER** nozzle located on the rear wall near the button of the vat to **FLUSH** sediment and debris towards the vat drain. When the **RED** handle Spray Blaster/Wash Wand Activation Lever is in the **DOWN (ON)** position shortening in the filter tub will be returned to a vat through the **TOPSIDE** connector identified above, provided 1) **ALL** other vat **PUMP LEVERS** are in the **UP (OFF)** position 2) the **ON** button on the Control Panel has been depressed, lighting the **RED** “PUMP” lamps.

C. **WASH WAND / SPRAY BLASTER** - The Wash Wand Assembly and “optional” Spray Blaster is used to **CLEAN** sediment and debris from the heat mechanism and sides of the vat. The Wash Wand consist of the **HANDLE/NOZZLE** assembly and a six (6) ft. (1829 mm) hose for use with either the **HANDLE NOZZLE** assembly and/or the optional **SPRAY BLASTER** which contains four (4) nozzels pointed downward when it is properly installed on a bracket to the rear of the fryer.

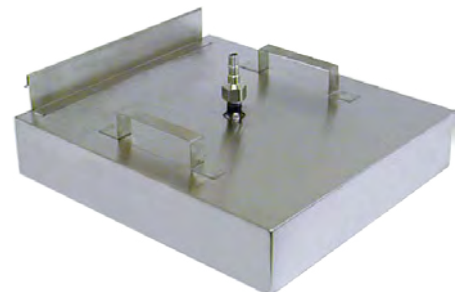

NOTE: This item and its storage caddy is only provided with a SC Model Fryer.

FILTER TUB ASSEMBLY - The Model SC Filter Tub Assembly consist of a “Micro-Mesh Stainless Steel Filter” or a “Magnapad Paper Envelope Filter”; and a Crumb Catcher Pan, Sludge Catcher Pan and Screen, Filter Tub Handle, Filter Tub Cover, and Filter Tub as well as, a two (2) piece Wash Down Hose Assembly shown below:

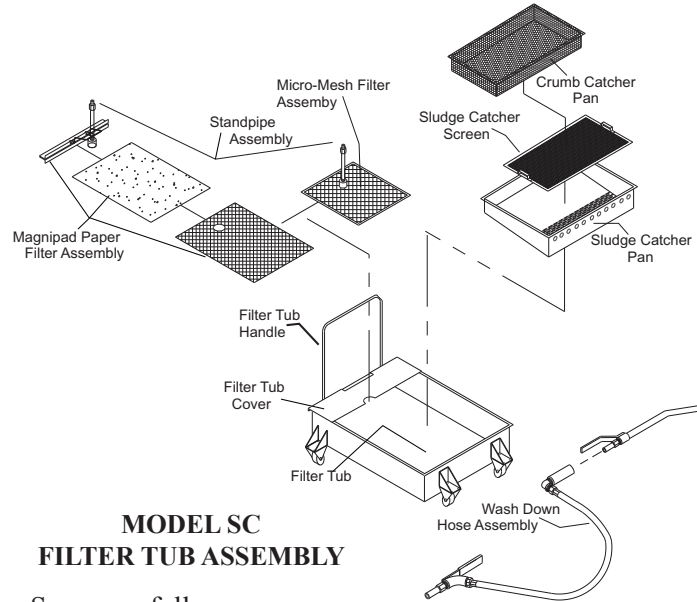



**MODEL SC
FILTER TUB ASSEMBLY**

A. Assemble a clean Filter Screen as follows:

1. “Micro-Mesh” Stainless Steel Filter Screen

- a. Remove the **STANDPIPE** (by turning the Knurled Knob) from the **FILTER SCREEN** assembly, grasp the **FINGER LOOP** on **FRAME A** and adjacent **FINGER LOOP** on **FRAME B**, **EVENLY** pull the frames apart; then **HINGE** **FRAME A** to remove it from the **FILTER SCREENS** **FIRST**.
- b. Grasp the **FINGER LOOP** on the straight side of **FRAME B**; then **HINGE** it to remove **FRAME B** from the **FILTER SCREENS**.
- c. Separate the **UPPER FILTER SCREEN** and **BAFFLE** from the **LOWER FILTER SCREEN**.
- d. **CAREFULLY** clean the two frames, screens and baffle in the 3 compartment sink with hot water and allow these items to air dry. **DO NOT USE SOAP**. If necessary the channels in each frame can be cleaned with the edge of a scotch-brite pad.
- e. Insert the **SUCTION FITTING** on the **BAFFLE** in the hole of the **UPPER FILTER SCREEN**; then place these items on top of the **LOWER FILTER SCREEN**.
- f. **ENSURE** all sides of the **FILTER SCREEN** assembly are aligned, place the **PIN** end of **FRAME A** on the **FILTER SCREENS**, place the **CHANNEL** on the frame adjacent to the **PIN** end over the **FILTER SCREENS**; then **HINGE** the frame so the edge of the **FILTER SCREENS** are inserted in the other **CHANNEL** of **FRAME A**.
- g. Place the **PIN** end of **FRAME B** on the **FILTER SCREENS** so the **PIN** is seated in the **CHANNEL** of **FRAME A** near the **FINGER LOOP**, place the **CHANNEL** on the frame adjacent to the **PIN** end over the edge of the **FILTER SCREENS**; then **HINGE** the frame so the edge of the **FILTER SCREENS** are inserted in the other **CHANNEL** of **FRAME B** and the **PIN** of **FRAME A** is seated in the **CHANNEL** of **FRAME B**.
- h. Adjust **FRAME A** and **B** so both **PINS** are properly seated in the **CHANNEL** of the opposite frame; then **CAREFULLY** connect the **KNURL KNOB** attached to the **STANDPIPE** to the **SUCTION FITTING** on the **FILTER SCREEN** assembly. **DO NOT OVERTIGHTEN!**

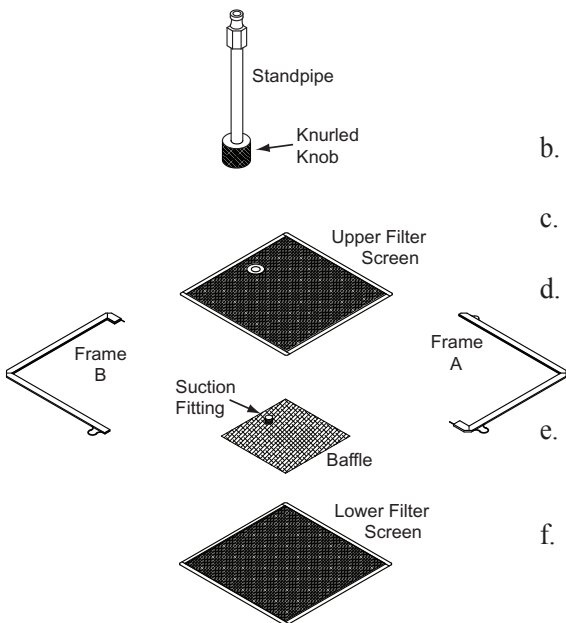

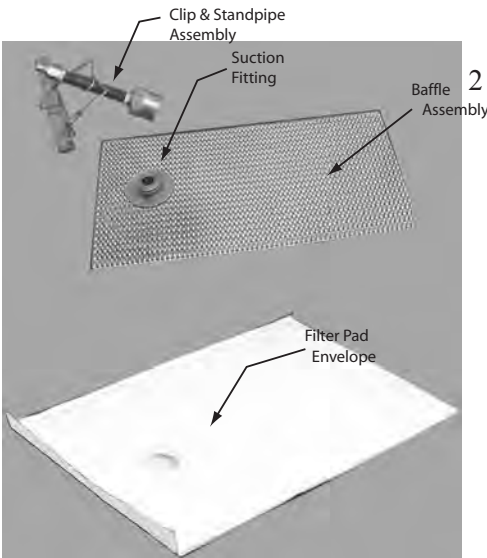

2 “Magnepad Paper Envelope” Filter

- a. Remove and discard the Filter Pad Envelope, **CAREFULLY** clean the Baffle Assembly and Clip/ Standpipe Assembly in the 3 compartment sink with **HOT** water and allow these items to air dry. **DO NOT USE SOAP!!** Re-assemble the Magnepad Envelope Filter using a **NEW** Filter Pad Envelope as follows:
 - 1) Insert the **BAFFLE** into the **FILTER PAD ENVELOPE**, when inserted properly the **SUCTION FITTING** will protrude through the hole in the pad.
 - 2) Fold **FLAP** over (in the direction of the hole), securing the Baffle inside the **FILTER PAD ENVELOPE**.
 - 3) **CAREFULLY**, align the **CLIP & STANDPIPE ASSEMBLY** so that the **CLIP** can secure the **FLAP** on the Envelope and the **STANDPIPE** will align over the **SUCTION FITTING** protruding through the Envelope.
 - 4) Tighten the Knurled **NUT** on the **STANDPIPE** on the **SUCTION FITTING** protruding through the Envelope.

B. Assemble the Filter Tub:


1. Make sure the **CRUMB CATCHER PAN**, **SLUDGE CATCHER PAN**, and **SCREEN**; **FILTER TUB**, **HANDLE** and **COVER**; **WASH DOWN HOSE**, **SUCTION LINE HOSE**, and **FILTER ASSEMBLY** are clean and dry.
2. Reassemble the Filter Tub by replacing the components in the following sequence: 1) **FILTER ASSEMBLY**, 2) **SLUDGE CATCHER SCREEN**, and **PAN**, 3) **CRUMB CATCHER PAN**, 4) **COVER**, 5) **SUCTION LINE HOSE** and **WASH DOWN HOSE**, and 6) **FILTER TUB HANDLE**.

CAUTION: WHEN ASSEMBLED, ENSURE THERE ARE NO FINGER LOOPS ON THE STANDPIPE SIDE OF THE MICRO-MESH FILTER.

- a. **CAREFULLY** insert the Filter Assembly in the bottom of the Filter Tub with the **STANDPIPE** centered in the handle end of the tub.
- b. **CAREFULLY** insert the Sludge Catcher Screen and Pan, and the Crumb Catcher Pan in the Filter Tub.

NOTE: Failure to **PROPERLY** insert and seat these items in the Filter Tub may **DAMAGE** Fryer Components when the Filter Tub is placed in its Storage Location.

- c. Place the cover on the Filter Tub; then install the Handle on the Filter Tub.
- d. Connect the **FEMALE** Quick-Connect Coupling on the Suction Line Hose to the **MALE** Quick-Connect Stem on the Filter Screen **STANDPIPE**, place the Filter Tub in front of the **FILTER TUB GUIDES** beneath the **LEFT** side of the fryer. **CAREFULLY** insert the filter tub on the Filter Tub Guides until the filter tub is butted against the **STOP** bracket; then, **SECURELY** connect the **MALE** Quick-Connect plug on the Suction Line Hose to the **FEMALE** Quick-Connect Bulkhead Suction Coupling on the fryer as shown below:

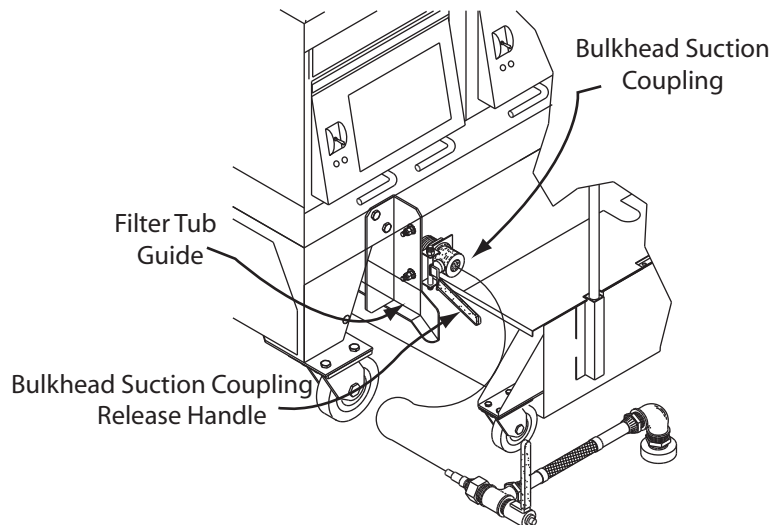








ULTRASTAT 21 COOKING COMPUTER OPERATION - The following are abbreviated operating procedures for a Model SC fryer equipped with an Ultrastat 21 Cooking Computer. The attached Ultrastat 21 Ultrafryer Computer Operation Instructions PN 30A009, contains **DETAILED** Operating, Filtering, Boil-Out and Programming Instructions.

A. START-UP and COOKING


1. **ULTRASTAT 21 START-UP** - Safely start-up a gas fryer equipped with an Ultrastat 21 Cooking computer as follows:

<u>STEP</u>	<u>ACTION</u>	<u>RESPONSE</u>
1	ENSURE the drain valve lever on the fryer is in the CLOSED position, shortening is at the proper level, then turn the fryer TOGGLE ON/OFF switch and, if applicable, the Gas Valve to the ON position.	A. The AMBER Power lamp beside the TOGGLE ON/OFF switch will LIGHT .
CAUTION: PRIOR TO PROCEEDING TO STEP 2 VISUALLY CHECK THAT THE HEAT MECHANISM IS COVERED WITH AT LEAST 2" (51 mm) OF SHORTENING.		
2	Turn the Computer ON by depressing the computer ON/OFF button.	A. The MELT lamp will LIGHT to indicate the computer is in the SHORTENING MELT MODE . B. The HEAT lamp on the computer and the RED heat mechanism indicator lamp on the fryer will cycle ON and OFF indicating the heat mechanism is periodically being turned ON and OFF to gently heat the shortening.
3	Once the Melt Limit Temperature is reached, depress the EXIT MELT BUTTON on the computer to cancel the SHORTENING MELT MODE .	A. LO will appear in the computer display indicating shortening temperature is more than 10°F (5°C) below the set-point temperature. B. The HEAT lamp on the computer and the RED heat mechanism indicator lamp will remain ON until the set-point temperature is reached.
4	When - - - - appears in the Computer display indicating the SET-POINT TEMPERATURE of the shortening has been reached, a COOK cycle can be initiated.	

2. **COOKING** - When the Computer is taken out of the **SHORTENING MELT MODE** each morning, shortening in the fryer vat will be heated to its **SETPOINT** temperature and "**LO**" will appear in the display to indicate the shortening temperature is **MORE** than **10°F (5°C)** **BELOW** the setpoint temperature. When shortening temperature rises to the **SETPOINT** temperature **- - - -** will appear in the display indicating a **COOK CYCLE** can be started.

- a. **STARTING A COOK CYCLE**- To start a cook cycle simply press the  product key for the product you wish to cook. If the product is programmed, the correct cooking time will be displayed  (example) and this time will immediately start to count down in minutes and seconds. If  is displayed immediately and the unit starts to signal, the key being operated is not programmed. If correctly programmed, it will count down to  followed by  and start to signal. To turn this signal **OFF** and reset the Computer, press the  product key used to start the **COOK CYCLE**.
- b. **CANCELLING A COOK CYCLE** - If a cook cycle was inadvertently started it may be cancelled two (2) ways:
 - 1) Press and hold the same product key  used to start the cook cycle for **4 SECONDS**. This prevents an accidental cancelling of a cook cycle while a product is being cooked.
 - 2) A cook cycle can be **CANCELLED** at any time by turning the Ultrafryer Toggle ON/OFF Switch to the **OFF** position.

B. FILTERING SHORTENING - Assemble and Install the Filter Tub as described in paragraph B page 21.

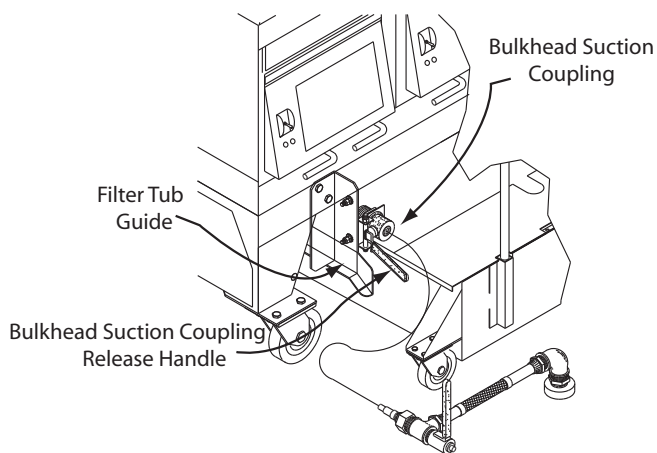

1. Turn the Toggle ON/OFF Switch on the fryer vat to be filtered **OFF**, place 16 ounces (.454 kg) by volume of **FILTER AGENT** in a 20" (508 mm) and 18" (457 mm) deep fryer vat; 14 ounces (.397 kg) in an 18" (457 mm) **SHALLOW** fryer vat; and 8 ounces (.227 kg) in a 14" (356 mm) fryer vat; thoroughly stir the filter agent into the shortening using the skimmer, then skim the shortening to remove any floating crumbs.

CAUTION: PRIOR TO PROCEEDING TO THE NEXT STEP, PUT ON SAFETY GOGGLES, NEOPRENE INSULATED GLOVES AND AN APRON.

2. Carefully open the drain valve on the vat to be filtered by turning the **DRAIN LEVER** slightly downward. When the bottom of the filter tub is covered with about 2" (51 mm) of shortening, **OPEN** the drain valve and slowly drain shortening to allow the heat mechanism to gradually **COOL**.
3. When all shortening in the vat has drained into the filter tub, use the **DRAIN ROD** to stand the wire rack on one side of the vat.
4. Use the drain rod to break up the sediment cake on the bottom of the vat.
5. Use a scraper to remove encrusted material from the sides of the vat and a scrubbing pad to remove carbon buildup from the top and sides of the heat mechanism. Use one (1) of the following procedures to **FLUSH** any remaining sediment or debris from the fryer vat:
 - a. Turn the **PUMP LEVER** to the **DOWN** "ON" position - The **RED** Pump Lamp will light and shortening in the filter tub will be pumped back into the vat through the **SWEEPER** nozzle in the bottom of the vat **FLUSHING** sediment and debris towards the vat drain. Use the drain rod or "L" shaped brush to pull the sediment on the bottom of the vat to and through the valve opening. When all sediment and debris has been flushed from the vat, turn the **PUMP LEVER** to the **UP** "Off" position, which will turn the **RED** "Pump" Lamp **OFF** and stop the shortening flow.
 - b. Connect the Wash Wand Nozzle to the Wash Wand Hose, **SECURELY** connect this assembly to the **TOPSIDE** Bulkhead coupling; then place the **NOZZLE** in the vat and hold it firmly against an inner wall to prevent the hose from "jumping" when the pump is turned on. Turn the **RED** handle Wash Wand Lever to the **DOWN** "ON" position. The **BLUE** "Open" lamp will light and shortening in the filter tub will be returned to the vat through the wash wand Hose and Nozzle which can be used to **FLUSH** sediment and debris from the vat walls, heat mechanism and bottom of the vat through the drain valve. **FLUSH** debris down the drain trough **PRIOR** to further cleaning of the fryer. When all sediment and debris has been flushed from the vat, turn the **RED** handle Wash Wand Lever to the **UP** "OFF" position, which will turn the **BLUE** "Open" Lamp **OFF** and stop the shortening flow.
 - c. If applicable, hang the **SPRAY BLASTER** Assembly on the Fry Basket/Spray Blaster Holder where it is **CENTERED** in the vat. **SECURELY** connect the female coupler on the Wash Wand Hose to the male plug on the Spray Blaster and connect the male plug on the other end of the hose to the **TOPSIDE** Bulkhead coupling. Turn the **RED** handle Wash Wand Lever to the **DOWN** "ON" position. The **BLUE** "OPEN" lamp will light and shortening in the filter tub will be returned to the vat through the four (4) nozzles in the bottom of the spray blaster flushing sediment and debris through the drain valve. When all sediment and debris has been flushed from the vat, turn the **RED** handle Wash Wand Lever to the **UP** "OFF" position, which will turn the **BLUE** "OPEN" lamp **OFF** and stop the shortening flow.

CAUTION: DO NOT FLUSH SEDIMENT AND DEBRIS FROM THE FRYER VAT ANY LONGER THAN NECESSARY, BUT NO LONGER THAN 2 MINUTES.

NOTE: Ensure the wash wand hose assembly is separated from the **NOZZLE ASSEMBLY / SPRAY BLASTER** and **TOPSIDE** Bulkhead coupling; then hung in an upright position so shortening in the hose can drain into a metal container.

6. Replace the wire rack in the fryer vat; then check and **ENSURE** the Pump Levers on the other vats are in the **UP** “OFF” position and that the **RED** and **BLUE** lamps are **OFF**.
7. Turn the **DRAIN LEVER** to the **DOWN** “OPEN” position; then **POLISH** the shortening in the filter tub as follows:
 - a. Fryers **WITHOUT** an **AUTOMATIC VAT CLEANER** and a Computer **WITHOUT** a **SHORTENING MANAGEMENT SYSTEM**:

STEP	ACTION	RESPONSE
1	Set a timer for the amount of time established for POLISHING shortening; then turn the PUMP LEVER to the DOWN “ON” position.	<ol style="list-style-type: none"> a. The RED “Pump” light will LIGHT. b. Shortening in the filter tub will begin circulating through the SWEEPER NOZZLE in the bottom of the vat.

CAUTION: DO NOT POLISH SHORTENING LONGER THAN THE TIME ESTABLISHED BY YOUR OPERATIONS DEPARTMENT.

2	When POLISHING is complete; turn the PUMP LEVER and DRAIN LEVER to the UP position.	<ol style="list-style-type: none"> a. The RED “Pump” light will turn OFF. b. Shortening Circulation will STOP.
3	Turn the PUMP LEVER to the DOWN “ON” position to return shortening in the filter tub to the fryer vat.	<ol style="list-style-type: none"> a. The RED “Pump” lamp will LIGHT. b. Shortening in the filter tub will be returned to the fryer vat through the SWEEPER NOZZLE in the bottom of the vat.
4	When ALL shortening has been returned to the vat as indicated by BUBBLING of the shortening in the rear of the vat, turn the PUMP LEVER to the “OFF” UP position.	<ol style="list-style-type: none"> a. The RED “PUMP” lamp will turn OFF. b. Bubbling action will stop.
5	CAREFULLY remove the sediment from the Micro-Mesh screen with the filter tub scraper. NOTE: Magnepad Paper Filters DO NOT have to be scraped.	
6	If applicable, add shortening to the vat.	


- 1) Repeat steps 1 through 6 above to Polish shortening in the remaining fryer vats.
- 2) When all vats have been **FILTERED** and **POLISHED**, hang the Wash Down Hose in an upright position so shortening can drain into a container, and disconnect the **SUCTION LINE HOSE** from the **STAND-PIPE** and **BULKHEAD** connector shown below.

NOTE: Failure to hang the Wash Wand Hose in an upright position to drain may cause the hose to become clogged with hardened shortening.

- 3) **THOROUGHLY** clean the Filter Tub assembly and then place it in its storage location as described in paragraph A 1 a 5) a) (9) page 38 of the Cleaning section of this manual.
- b. Fryers **WITH** an **AUTOMATIC VAT CLEANER** and a Computer **WITHOUT** a **SHORTENING MANAGEMENT SYSTEM**:
 - 1) Hang the Automatic Vat Clean (Spray Blaster) on the Fry Basket/Spray Blaster Holder where it is **CENTERED** in the vat, **SECURELY** connect the female coupler on the Wash Wand Hose to the Male plug on the Spray Blaster and connect the male plug on the other end of the hose to the **TOPSIDE** Bulkhead Coupler.
 - 2) Repeat procedures in paragraph B 1 through B 7 a 3) above.
 - 3) Disconnect and remove the Spray Blaster and Wash Wand Hose from the fryer, **THOROUGHLY** clean the Spray Blaster and hang the Wash Down Hose in an upright position to allow shortening to drain into a container.
 - c. Fryers with **AUTOMATIC VAT CLEANER** and a Computer **WITH** the **SHORTENING MANAGEMENT SYSTEM**:

- 1) Install and connect the Spray Blaster to the fryer as described in 7 b 1) on page 16.
- 2) Filter and polish the shortening in each fryer vat following the procedures contained in the “Shortening Management Training Guide: and the “Addendum” to the Ultrastat 21 Ultrafryer Computer Operation Instructions provided with each fryer.
- 3) Disconnect and remove the Spray Blaster and Wash Wand Hose as described in paragraph 7 b 3). on page 24.

C. SHORTENING DISPOSAL/FRYER BOIL-OUT - the instructions listed below “complement” procedures contained in the applicable Maintenance & Repair or Operating Instruction Manual which should be used along with this manual when **BOILING OUT** a fryer.

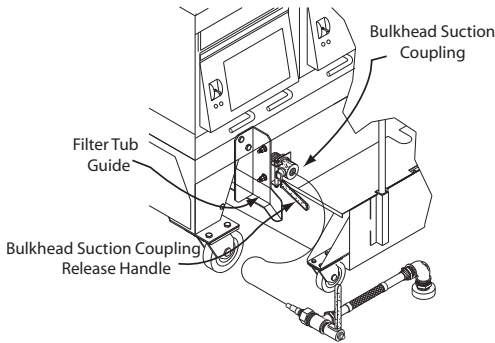

1. **SHORTENING REMOVAL / DISPOSAL** - Fryer vats should be **BOILED-OUT** at least every **7 DAYS** to remove carbon build up and other encrusted materials and those fryers with an Ultrastat 21 Cooking Computer with the **SHORTENING MANAGEMENT SYSTEM** should be **BOILED-OUT** when **diSP** appears in the computer display.
 - a. If the store is equipped with a Shortening Disposal System, remove used shortening from the fryer vat that is **CLOSEST** to the Shortening Disposal System connector. If the store is **NOT** equipped with a Shortening Disposal System, remove used shortening from the first fryer vat.
 - b. Assemble and install the Filter Tub on the **FILTER TUB GUIDES** as described on page 21.
 - c. Turn the **TOGGLE ON/OFF SWITCH** and, if applicable, the **MANUAL GAS VALVE** to the first vat **OFF**.

CAUTION: PRIOR TO PROCEEDING TO THE NEXT STEP, PUT ON SAFETY GOGGLES, NEOPRENE INSULATED GLOVES AND AN APRON.

- d. Turn the venthood Exhaust Fan **ON** and drain shortening from **EACH** fryer vat as follows:
 - 1) Carefully open the drain valve by turning the **DRAIN LEVER** slightly downward. When the bottom of the filter tub is covered with about 2” (51 mm) of shortening, **OPEN** the drain valve and slowly drain shortening to allow the heat mechanism to gradually **COOL**.
 - 2) When all shortening has drained into the filter tub, use the **DRAIN ROD** to stand the wire rack on one side of the vat.
 - 3) Use a scraper to remove encrusted material from the sides of the vat and a scrubbing pad to remove carbon buildup from the top and sides of the heat mechanism. Use one of the following procedures to **FLUSH** any remaining sediment or debris from the fryer vat.
 - a) Turn the **PUMP LEVER** to the **DOWN “ON”** position - The **RED** Pump Lamp will light and shortening in the filter tub will be pumped back into the vat through the **SWEEPER** nozzle in the bottom of the vat **FLUSHING** the sediment and debris towards the vat drain. Use the drain rod or “L” shape brush to pull the sediment on the bottom of the vat to and through valve opening. When all sediment and debris has been flushed from the vat, turn the **PUMP LEVER** to the **UP “OFF”** position, which will turn the **RED** pump lamp **OFF** and stop the shortening flow.
 - b) Connect the Wash Wand nozzle to the Wash Wand Hose, **SECURELY** connect the male plug on the hose to the **TOPSIDE** Bulkhead Coupler; then place the **NOZZLE** in the vat and hold it firmly against an inner wall to prevent the hose from “jumping” when the pump is turned **ON**. Turn the **RED** handle Wash Wand Lever to the **DOWN “ON”** position. The **BLUE “OPEN”** lamp will light and shortening in the filter tub will be returned through the Wash Wand Hose and Nozzle which can be used to **FLUSH** sediment and debris from the vat walls, heat mechanism and bottom of the vat through the drain valve. When all sediment and debris has been flushed from the vat, turn the **RED** handle Wash Wand Lever to the **UP “OFF”** position which will turn the **BLUE “OPEN”** lamp **OFF**, and stop the shortening flow.
 - c) If applicable, hang the **SPRAY BLASTER** Assembly on the Fry Basket/Spray Blaster Holder where it is **CENTERED** in the vat. **SECURELY** connect the female coupler on the Wash Wand Hose to the male plug on the Spray Blaster and connect the male plug on the other end of the hose to the **TOPSIDE** Bulkhead coupler. Turn the **RED** handle Wash Wand Lever to the **DOWN “ON”** position. The **BLUE “OPEN”** lamp will light and shortening in the filter tub will be returned to the vat through the four (4) nozzles in the bottom of the spray blaster flushing sediment and debris through the drain valve. When all sediment and debris has been flushed from the vat, turn the **RED** handle Wash Wand Lever to the **UP “OFF”** position, which will turn the **BLUE “OPEN”** lamp **OFF** and stop the shortening flow.
 - 4) When shortening has completely drained from the vat, turn the **PUMP LEVER** and **DRAIN LEVER** to the **(UP)** position.

- 5) Dispose of used shortening as follows:
 - a) Restaurants **NOT** equipped with a Shortening Disposal System:
 - (1) Place the Wash Down Hose nozzle into a **METAL** container and hold it firmly against an inner wall. This prevents the hose from “jumping” when the Filter Pump is turned on.
 - (2) Turn the **RED** Handle Wash Wand **LEVER** to the “ON” (**DOWN**) position and pump shortening from the filter tub into the metal container.
 - (3) When all shortening in the filter tub has been pumped into the metal container, turn the **RED** Handle Wash Wand **LEVER** to the “OFF” (**UP**) position and remove any sediment from the Micro-Mesh filter screen using the filter tub scraper.

NOTE: Magnepad Paper Filter Assemblies **DO NOT** have to be **SCRAPED**.

- (4) Repeat steps d 1), d 2), d 3), d 4), d 5) a) (1) - (3) above to remove shortening from remaining vats to metal containers.
- b) Restaurants **EQUIPPED** with a Shortening Disposal System:
 - (1) Remove the Wash Down Hose from the **TOPSIDE** BULKHEAD coupler; then connect the **MALE** plug on the Shortening Disposal Hose to this coupler.
 - (2) **SECURELY** connect the fitting on the other end of the Shortening Disposal Hose to the Disposal System connector on the wall.
 - (3) Turn the **RED** Handle Wash Wand **LEVER** to the “ON” (**DOWN**) position and pump shortening from the filter tub into the exterior rendering tank.
 - (4) When all shortening has been suctioned from the filter tub, turn the **RED** Handle Wash Wand **LEVER** to the “OFF” (**UP**) position, and remove any sediment from the Micro-Mesh filter screen using the Filter Tub Scraper.

NOTE: Magnepad Paper Filter Assemblies **DO NOT** have to be **SCRAPED**. Leave the Shortening Disposal Hose connected to the vat stem and the Disposal Stem connector.

- (5) Repeat steps d1) through d5) and b) (1) through (4) above to transfer shortening from remaining vats to the exterior rendering tank.
- (6) Remove the Shortening Disposal Hose from **TOPSIDE** BULKHEAD coupler and replace the wire rack in each vat.
- (7) **IMMEDIATELY** hang the Wash Down Hose and, if applicable the Shortening Disposal Hose in an upright position and **THOROUGHLY** clean and reassemble the filter tub.


NOTE: “**diSP**” will disappear in the Ultrastat 21 Cooking Computer display with the **SHORTENING MANAGEMENT SYSTEM** after the shortening has been discarded.

2. FRYER BOIL-OUT

- a. **BOIL-OUT** each fryer following cleaning instructions contained in the Cleaning Manual provided by your approved chemical supplier. The following are generic procedures:
 - 1) Ensure all Drain Levers are in the closed (**UP**) position, then add water to each vat until it reaches a point two **2” (51 mm)** **BELOW** the middle line of the “**E ←**” in the word **LEVEL** of the **UPPER** shortening level mark on the rear wall of the vats.
 - 2) Add the amount of **BOIL-OUT COMPOUND** in each fryer vat as prescribed in the Cleaning Manual provided by the Chemical Supplier.
 - 3) Turn the Toggle ON/OFF switch and, if applicable, Manual Gas valve for each fryer vat to the **ON** position; then depress the Computer ON/OFF key to the **ON** position.


NOTE: The drain lever must be in the closed **UP** position to turn the computer **ON**.

- 4) Place the Computer in the **BOIL MODE** by pressing the following Computer keys in the order shown:



NOTE: **boil** will appear in the Computer display and the Computer will turn the Ultrafryer heat mechanism ON and OFF to heat and maintain the boil-out solution to **190°F (88°C)**.

- 5) When the boil-out solution reaches **190°F (88°C)** set a timer for 30 minutes. Frequently scrub the sides, front and rear of each fryer vat with a long handled scrub brush.
- 6) After the boil-out solution has '**BOILED**' for 30 minutes and the timer sounds press the following computer keys in the order shown to **EXIT BOIL MODE**:



- 7) Turn the Toggle ON/OFF Switch and, if applicable, the Manual Gas Valve for each fryer to their **OFF** position and **CAREFULLY** dispose of the boil-out solution in each fryer into a floor drain.

NOTE: Do not use the filter pump to remove water from the vats as this will cause premature pump failure and void the pump warranty.

- 8) Use a scrubbing pad to remove carbon buildup from the top of the heat mechanism. To remove carbon buildup on the sides and bottom of the heat mechanism; slide one end of a stropping pad under each section, grasp that end with a pair of tongs, and rock the pad up and down along the length of each section until all encrusted material has been removed.
- 9) Rinse each fryer with hot water until the water coming out of the drain valve is clear.
- 10) Mix a solution of **ONE PART** vinegar to **25 PARTS** of water. Place this mixture into a one gallon garden pressure sprayer; and **THOROUGHLY** spray this solution onto the **SIDES, HEAT MECHANISM,** and **BOTTOM** of each fryer to neutralize the Boil-Out Compound.

NOTE: Boil-Out Compound will cause shortening to break down rapidly if it is not neutralized.

- 11) **THOROUGHLY** wipe the sides, heat mechanism, and bottom of each fryer with clean, lint-free, dry towels to remove any remaining water; then fill each fryer with **NEW** shortening following procedures on page 12 of this manual.

ULTRASTAT 25 COOKING COMPUTER OPERATION - The following are abbreviated operating procedures for a Model SC fryer equipped with an Ultrastat 25 Cooking Computer. The attached Ultrastat 25 Ultrafryer Computer Operation Instructions PN 30A051, contains **DETAILED** Operating, Filtering, Boil-Out and Programming Instructions.

A. START-UP and COOKING

1. **ULTRASTAT 25 START-UP** - Safely start-up a gas fryer equipped with an Ultrastat 25 Cooking computer as follows:

<u>STEP</u>	<u>ACTION</u>	<u>RESPONSE</u>
1	ENSURE the drain lever on the fryer is in the CLOSED position, shortening is at the proper level, then turn the fryer TOGGLE ON/OFF switch to the ON position.	A. The AMBER Power lamp beside the TOGGLE ON/OFF switch will LIGHT .
2	Turn the Computer ON by depressing the computer ON/OFF key.	A. MELT E, G, or P , will appear in the computer Display to indicate the computer is in the SHORTENING MELT MODE . B. The HEAT DEMAND lamps on the computer and the RED INDICATOR lamp on the fryer will cycle ON and OFF indicating the heat mechanism is periodically being turned ON and OFF to gently heat the shortening.
3	When the MELT RELEASE TEMPERATURE is reached, the Melt Mode may be canceled by pushing the OK/EXIT key.	A. LOW will appear in the computer display indicating shortening temperature is more than the READY BAND below the (SETPOINT) temperature B. The HEAT DEMAND lamps on the computer and the RED INDICATOR lamp on the fryer will cycle ON and OFF indicating the heat mechanism is being periodically turned ON and OFF to gently heat the shortening.
4	When READY appears in the computer display indicating the shortening temperature is no more than the READY BAND below (SETPOINT) and is no higher than 40°F (22°C) above the (SETPOINT) temperature, a COOK cycle can be initiated. NOTE: The READY BAND is factory set according to the customer's order, usually set at 10°F (5°C).	

2. COOKING

When the Computer is taken out of the **SHORTENING MELT MODE** each morning, shortening in the fryer vat will be heated to its SETPOINT temperature and "**LOW**" will appear in the display to indicate the shortening temperature is MORE than the **READY BAND** temperature **BELOW** the setpoint temperature. When shortening temperature rises to the **SETPOINT** temperature **READY** will appear in the display indicating a **COOK CYCLE** can be started.

a. STARTING A COOK CYCLE

To start a cook cycle, simply press the Product Key LED will played, (example, **14:00**) and this sounds. If correctly programmed, the **DONE 1** will appear in the display. Press Product Key 1 to silence the alarm and reset that product key for another cook cycle.



the product key you wish to cook. If the product key is programmed **BLINK FAST** and **CK 1** and correct cooking time will be displayed and will immediately start to count down in minutes and seconds. The computer will count down to **00:00**, the alarm will **SOUND**.

b. CANCELLING A COOK CYCLE

If a cook cycle was inadvertently started


- 1) Press and hold the same product key used to start the cook cycle for **4 SECONDS**. This prevents an accidental cancelling of a cook cycle while a product is being cooked.
- 2) A cook cycle can be **CANCELLED** at any time by turning the Ultrafryer Toggle **ON/OFF SWITCH** to the **OFF** position.





it may be cancelled two (2) ways:

B. FILTERING SHORTENING - In many restaurant situations shortening in the Ultrafryer should be filtered at least twice a day, once after the lunch rush and again after the dinner rush. Other users may establish filter frequencies in line with their oil cleaning requirements and programmed filter prompts. The fryer vat used to cook French Fries should be filtered **FIRST**, followed by fryer vats for other products. The instructions listed below "complements" step-by-step procedures contained in the applicable Ultrafryer Fryer Maintenance and Repair Manual which should be used along with this manual when **FILTERING SHORTENING**.

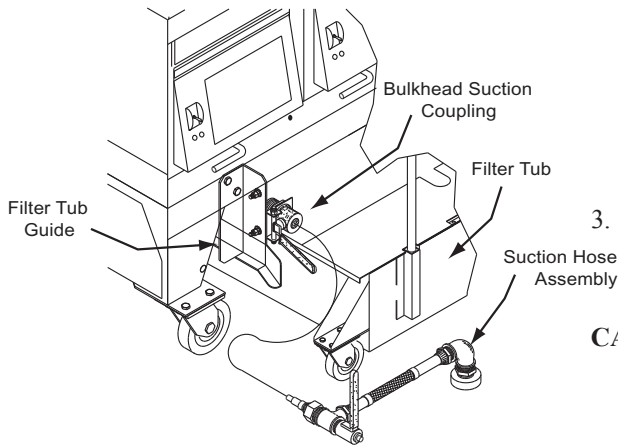1. Assemble and install the Filter Tub on the **FILTER TUB GUIDES** as described on page 21.



2. When the **FILTER PROMPT FEATURE** has been activated and **FILTER** appears in the display, alternating with a normal display; 1) press the  key to display the current **HITS**, 2) press the  key again to display the current **TIME PROMPT** time and 3) plan to filter shortening at the next convenient time.

3. When it is convenient to filter shortening, filter each fryer as follows:
 - a. Turn the **TOGGLE ON/OFF SWITCH** and if applicable, **MANUAL GAS VALVE** for the vat to be filtered **OFF**.

CAUTION: DO NOT TURN THE COMPUTER OFF!!

- b. Place **16 OUNCES (.45 kg)**, by volume, of **FILTER AGENT** in a 20" (508 mm) and 18" (457 mm) deep fryer vat, 14 ounces (.39 kg) in an 18" (457 mm) shallow fryer vat and 8 ounces (.23 kg) in a

14" (356 mm) fryer vat; thoroughly stir the filter agent into the shortening using the skimmer, then skim the shortening to remove any floating crumbs.

CAUTION: PRIOR TO PROCEEDING TO THE NEXT STEP, PUT ON SAFETY GOGGLES, NEOPRENE INSULATED GLOVES AND AN APRON.

- c. Carefully open the drain valve on the vat to be filtered and polished by turning the **DRAIN LEVER** slightly downward, **DRAINING** alternating with **FILTER** will appear in the Computer display. When the bottom of the filter tub is covered with about two (2) inches (51 mm) of shortening, **OPEN** the drain lever and slowly drain shortening to allow the heat mechanism to gradually **COOL**.
- d. When all shortening in the vat has drained into the filter tub, use the **DRAIN ROD** to stand the wire rack on one side of the vat.
- e. Use the drain rod and/or the "L" shaped brush to pull the sediment on the bottom of the vat towards the valve opening, then use the rod to push sediment through the valve opening.
- f. **SECURELY** connect the **MALE In-Line Plug** on the Wash Down Handle & Nozzle to the **FEMALE Locking Seal Coupling** on the Wash Down Hose then **SECURELY** connect the **MALE IN-LINE Plug** on the other end of the Wash Down Hose to the **TOPSIDE Bulkhead Coupling** on the upper rear panel of the fryer. A distinct **CLICK** will be heard when the Male Plug is properly seated in the Female Coupling.
- g. Use a scraper to remove encrusted material from the sides of the vat and a scrubbing pad to remove carbon build-up from the top and sides of the heat mechanism. Use one (1) of the following procedures to **FLUSH** any remaining sediment or debris from the fryer vat:
 - 1) Turn the **PUMP LEVER** to the **DOWN "ON"** position. The **RED "Pump" Lamp** will light and shortening in the filter tub will be pumped back into the vat through the **SWEEPER** nozzle in the bottom of the vat **FLUSHING** sediment and debris towards the vat drain. Use the drain rod or "L" shaped brush to pull the sediment on the bottom of the vat to and through the valve opening. When all sediment has been flushed from the vat, turn the **PUMP LEVER** to the **UP "OFF"** position, which will stop the shortening flow and turn the **RED "Pump" Lamp OFF**.
 - 2) Connect the Wash Wand Nozzle to the Wash Wand Hose, **SECURELY** connect this assembly to the **TOPSIDE BULKHEAD** coupler; then place the **NOZZLE** in the vat and hold it firmly against an inner wall to prevent the hose from "jumping" when the pump is turned on. Turn the **RED** handle Wash Wand Lever to the **DOWN "ON"** position. The **BLUE "OPEN"** lamp will light and shortening in the filter tub will be returned to the vat through the wash wand hose and nozzle which can be used to **FLUSH** sediment and debris from the vat walls, heat mechanism and bottom of the vat through the drain valve. When all sediment and debris has been flushed from the vat, turn the **RED** handle Wash Wand Lever to the **UP "OFF"** position which will stop the shortening flow from the nozzle and turn the **BLUE "OPEN" lamp OFF**.

- 3) If applicable, hang the **SPRAY BLASTER** assembly on the Fry Basket/Spray Blaster Holder where it is **CENTERED** in the vat. **SECURELY** connect the male plug on the Wash Wand Hose to the female coupler on the Spray Blaster and connect the male plug on the other end of the hose to the **TOPSIDE BULKHEAD** coupling. Turn the **RED** handle Wash Wand Lever to the **DOWN “ON”** position. The **BLUE “OPEN”** lamp will light and shortening in the filter tub will be returned to the vat through the four (4) nozzles in the bottom of the spray blaster flushing sediment and debris through the drain valve. When all sediment and debris has been flushed from the vat, turn the **RED** handle Wash Wand Lever to the **UP “OFF”** position, which will stop shortening flow from the blaster nozzles and turn the **BLUE “OPEN”** lamp **OFF**.

CAUTION: DO NOT FLUSH SEDIMENT AND DEBRIS FROM THE FRYER VAT ANY LONGER THAN NECESSARY, BUT NO LONGER THAN 2 MINUTES.

- h. Replace the wire rack in the fryer, ensure the Pump Levers on other vats are in the **UP “OFF”** position and that the **RED** and **BLUE** lamps are **OFF**.

NOTE: Ensure the wash wand hose assembly is separated from the **NOZZLE ASSEMBLY/SPRAY BLASTER** and **TOPSIDE** Bulkhead coupling; then hang it in an upright position so shortening in the hose can drain into a metal container.

- i. **POLISH** the shortening in the filter tub as follows:

- 1) Fryers **WITHOUT** a **DIGITAL TIMER** or an **AUTOMATIC VAT CLEANER**:

- a) Turn the **Pump Lever** to the **“ON” (DOWN)** position to allow shortening in the filter tub to circulate through the system; then, press the **TIME** key on the Computer to activate the Filter Timer.

FILT 10:00 will appear in the display and immediately start counting down.



CAUTION: DO NOT POLISH THE SHORTENING LONGER THAN TEN (10) MINUTES AS IT WILL PUMP EXCESS AIR INTO THE SHORTENING CAUSING SHORTENING TO BREAK DOWN.

NOTE: The filter pump system can **ONLY** be operated when the fryer’s Toggle ON/OFF switch is in the **OFF** position and the **PUMP LEVER** is in the **“ON” (DOWN)** position.


- b) When the Filter Timer counts down to **00:00**, **FILTER** alternating with **DONE** will appear in the display and an alarm will sound for about 5 seconds.
- c) The Filter Timer can be terminated early or **TIMEOUT/ALARM** acknowledged, by pressing the **OK/EXIT** key. The display will then be **DRAIN** alternating with **CLOSE**.
- d) Turn the **PUMP LEVER** and **DRAIN LEVER** to the (UP) position. The Filter Hit Count and Time Prompt will reset and the display will show **TURN OFF**. In addition, closing the Drain Valve will also terminate the **FILTER DONE** display.
- e) Turn the **Pump Lever** to the **“ON” (DOWN)** position to automatically return the shortening in the filter tub to the Fryer.
- f) When all shortening has been returned to the vat, turn the Pump Lever to the **“OFF” (UP)** position, then **CAREFULLY** remove any sediment from the filter screen using the Filter Tub Scraper.


NOTE: Magnepad Paper Filter Assemblies **DO NOT** have to be **SCRAPED** after filtering shortening.

NOTE: The **RED** Pump Lamp will **LIGHT** whenever the **PUMP LEVER** is **“ON” “DOWN”** and will turn **OFF** when the lever is in the **UP “OFF”** position.

- g) If applicable, add shortening to the fryer vat; then press the  key, **OFF**, then back **ON** again to resume normal operation. **MELT G/E/P** will appear in the  display.
- h) Repeat step 3 i 1) a) through 3 i 1) g) to filter shortening in the remaining vats.
- i) When all vats have been filtered, separate the Wash Down Hose Nozzle from the hose and **IMMEDIATELY** hang the hose in an upright position so shortening can drain into a container. Remove the the Suction Line Hose Assembly from the **BULKHEAD** Suction Coupling beneath the left end of the fryer by depressing the **BUTTON** release lever; then remove the filter tub from beneath the fryer.
- j) Remove the Filter Tub from beneath the fryer, **THOROUGHLY** clean the filter tub assembly according to procedures in the Cleaning Section; then re-assemble the filter tub and place it in its storage location.
- 2) Fryers **WITH** a **DIGITAL SC TIMER** and an **AUTOMATIC VAT CLEANER**:
 - a) Hang the “Automatic Vat Cleaner” (Spray Blaster) on the Fry Basket/Spray Blaster Holder where it is **CENTERED** in the vat, **SECURELY** connect the female coupler on the Wash Wand Hose to the male plug on the Spray Blaster and connect the male plug on the other end of the hose to the **TOPSIDE** Bulkhead Connector.

- b) Ensure the Drain Lever for the vat to be filtered is in the **DOWN** “OPEN” position then perform the following steps to polish the shortening:

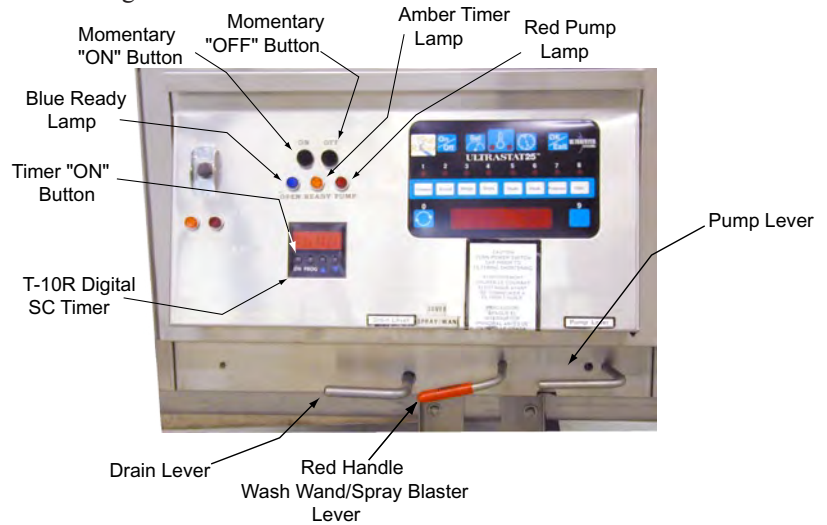

<u>STEP</u>	<u>ACTION</u>	<u>RESPONSE</u>
1	Turn the RED Handle Spray Blaster/Wash Wand Lever to the DOWN “ON” position.	a. The BLUE “READY” lamp will LIGHT .
2	Depress then release the “Momentary” ON button.	a. Electrical power will be applied to the SC Digital Timer circuitry. b. The AMBER “TIMER” lamp will LIGHT .
3	Depress the ON button on the SC Digital Timer.	a. The RED “PUMP” lamp will LIGHT . b. The pre-set POLISH time will appear on the timer display and immediately start counting down. c. Shortening in the Filter tub will begin circulating through the Wash Down Hose or Spray Blaster and the vat to POLISH the shortening.
4	When the “pre-set” POLISH time counts down to 00:00 , an ALARM will sound.	a. Depress the OFF button on the SC Digital Timer, which will turn the RED “PUMP” lamp OFF . b. Depress then release the “Momentary” OFF button which will turn the AMBER “TIMER” lamp OFF . c. Turn the RED Handle Wash Wand Lever to the UP “OFF” position which will turn the BLUE “READY” lamp OFF .
5	Turn the Drain Lever to the CLOSED “UP” position; then turn the Pump Lever to the DOWN “ON” position.	a. The RED “PUMP” lamp will turn ON . b. Shortening in the filter tub will be returned to the vat through the SWEEPER NOZZLE on the bottom of the vat.
6	When ALL shortening has been returned to the vat as indicated by the bubbling at the rear of the vat, turn the Pump Lever to the UP “OFF” position.	a. The RED “PUMP” lamp will turn OFF . b. Bubbling at the rear of the vat will stop.
7	If applicable, add shortening to the vat, then press the  key OFF , then back ON again to resume normal operation for that vat.	

- c) Remove sediment and debris from the micro-mesh filter screen using the scraper.

NOTE: Magnepad Paper Filter Assemblies **DO NOT** have to be scraped.


- d) Repeat procedures in paragraphs 3 i 2) a) through 3 i 2) c) including steps 1-7 above to polish shortening in the other vats.
- e) When the shortening in **ALL** vats have been polished; remove, clean and place the Spray Blaster in its storage location; then hang the Wash Wand Hose in an upright position so shortening can drain into a container.
- f) Remove the filter tub from beneath the fryer, **THOROUGHLY** clean the filter tub assembly according to procedures in the Cleaning Section; then reassemble the filter tub and place it in its storage location.

C. SHORTENING DISPOSAL/FRYER BOIL-OUT

The instructions listed below “complement” step-by-step procedures contained in the applicable Ultrafryer Maintenance and Repair Manual which should be used along with this manual when **BOILING OUT** a fryer.

1. **SHORTENING REMOVAL/DISPOSAL** - If the Computer has been programmed for the **DISPOSAL PROMPT FEATURE**, **DISPOSE** alternating with a “NORMAL” display will appear in the Computer Display when the Disposal Hit Count Limit (**DHL #####**) is reached. Cooking Operations may continue until it is convenient to dispose of shortening. When it is convenient to dispose of shortening proceed as follows:

- a. If the store is equipped with a Shortening Disposal System, remove used shortening from the fryer vat that is **CLOSEST** to the Shortening Disposal System connector. If the store is **NOT** equipped with a Shortening Disposal System, remove used shortening from the first fryer vat.
- b. Position the assembled filter tub in front of the **FILTER TUB GUIDES** beneath the **LEFT** side of the fryer bank; then roll the filter tub under the fryer until it is butted against the **FILTER TUB STOP** beneath the rear of the fryer as shown to the right:
- c. Turn the **TOGGLE ON/OFF SWITCH** and, if applicable, **MANUAL GAS VALVE** to the first vat **OFF**; then **SECURELY** connect the suction line hose assembly to the **STANDPIPE** on the filter screen and the **BULKHEAD SUCTION COUPLING** on the Fryer as shown.

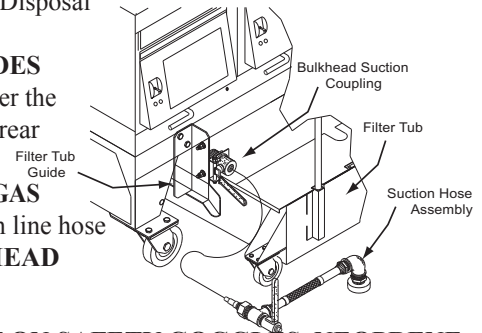

CAUTION: PRIOR TO PROCEEDING TO THE NEXT STEP, PUT ON SAFETY GOGGLES, NEOPRENE INSULATED GLOVES AND AN APRON.

- d. Turn the venthood Exhaust Fan **ON** and drain shortening from **EACH** fryer vat as follows:
 - 1) Carefully open the drain valve by turning the **DRAIN LEVER** slightly downward. When the bottom of the filter tub is covered with about 2” (51 mm) of shortening, **OPEN** the drain lever and slowly drain shortening to allow the heat mechanism to gradually **COOL**.

NOTE: When the drain valve is opened, **DISPOSE** alternating with **DRAINING** will appear in the display.

- 2) When all shortening has drained into the filter tub, use the **DRAIN ROD** to stand the wire rack on one side of the vat.
- 3) **SECURELY** connect the **MALE** In-Line Plug on the Wash Down Handle and Nozzle to the **FEMALE** Locking Seal Coupling on the Wash Down Hose; then **SECURELY** connect the **MALE** In-Line Plug on the other end of the Wash Down Hose to the **TOPSIDE** Bulkhead Coupling on the upper rear panel of the Fryer. A distinct **CLICK** will be heard when Male Plugs are properly seated in the female couplings.

CAUTION: IF THE PLUGS ARE NOT SECURELY ATTACHED TO THE COUPLERS, HOT SHORTENING WILL BE DISCHARGED AROUND THESE CONNECTIONS WHICH COULD CAUSE SEVERE BURNS.

- 4) Place the Wash Down Hose Nozzle into the vat and hold it firmly against the inner wall. This prevents the hose from “jumping” when the Filter Pump is turned on.
- 5) Turn the **RED** handle Wash Wand Lever to the **DOWN “ON”** position. The **BLUE** “OPEN” lamp will light and shortening in the filter tub will be returned to the vat through the Wash Wand Nozzle. Hold the nozzle at a 45° angle from the bottom of the vat causing the shortening sediment and debris to bounce off the rear wall of the fryer and flow toward the drain valve.
- 6) Use the drain rod to push the sediment through the drain valve to keep the drain clear. Hose off the Heat Mechanism and all walls of the fryer vat until all the shortening and residue on the bottom of the vat has been flushed through the drain into the filter tub.
- 7) When all sediment and debris has been flushed from the vat; turn the **RED** handle Wash Wand Lever to the **UP “OFF”** position which will stop shortening flow from the nozzle and turn the **BLUE** “OPEN” lamp **OFF**.
- 8) Turn the **DRAIN LEVER** to the closed **UP** position and dispose of the used shortening as follows:
 - a) Restaurants **NOT** equipped with a Shortening Disposal System:
 - (1) Place the Wash Down Hose nozzle into a **METAL** container and hold it firmly against an inner wall. This prevents the hose from “**JUMPING**” when the Filter Pump is turned **ON**.

- (2) Turn the Wash Wand Lever to the “ON” **DOWN** position and pump the used shortening in the filter tub into the metal container.
- (3) When all shortening in the filter tub has been pumped into the metal container, turn the **RED HANDLE WASH WAND LEVER** to the “OFF” (**UP**) position and remove any sediment from the micro-mesh filter screen using the filter tub scraper.

NOTE: Magnepad Paper Filter Assemblies **DO NOT** have to be **SCRAPED**.

- (4) Repeat steps **d1), d2), d3), d4), d5), d6), d7), d8) a) (1) through (3)** above to remove shortening from remaining vats to metal containers.
- b) Restaurants **EQUIPPED** with a Shortening Disposal System:
 - (1) Remove the Wash Down Hose **MALE** In-Line Plug from the **TOPSIDE** Bulkhead Coupling on the upper panel of the Fryer by depressing the **BUTTON RELEASE** lever; then **SECURELY** connect the Shortening Disposal Hose **MALE** In-Line Plug to this **TOPSIDE** Bulkhead Coupling.
 - (2) **SECURELY** connect the fitting on the other end of the Shortening Disposal Hose to the Disposal System connector on the wall and **ENSURE ALL** valves (pertinent to the flow of shortening) to the Rendering tank are **OPEN**.
 - (3) Turn the **RED HANDLE** Wash Wand Lever to the “ON” (**DOWN**) position and pump shortening from the filter tub into the exterior rendering tank.
 - (4) When all shortening has been suctioned from the filter tub, turn the Wash Wand Lever to the “OFF” (**UP**) position, and if applicable, remove any sediment from the Micro-Mesh filter screen using the Filter Tub Scraper. **THE MAGNEPAD FILTER DOES NOT HAVE TO BE SCRAPED.**

NOTE: Leave the Shortening Disposal Hose connected to Bulkhead Coupling and Disposal System connector.

- (5) Repeat steps **d1), d2), d3), d4), d5), d6), d7)** and **d8) b) (1) through (4)** to remove shortening from remaining vats to exterior rendering tank.
- 9) Remove the Shortening Disposal Hose/Wash Down Hose from the **TOPSIDE** Bulkhead Coupling on the rear wall of the fryer and replace the wire rack in each vat.
- (10) **IMMEDIATELY** hang the Wash Down Hose and, if applicable the Shortening Disposal Hose in an upright position and **THOROUGHLY** clean and reassemble the filter tub. If applicable, replace the Magnepad **FILTER PAD ENVELOPE** by following procedures in step A. 2 on page 21.

2. FRYER BOIL-OUT


- a. **BOIL-OUT** each fryer following cleaning instructions contained in the Cleaning Manual provided by your approved chemical supplier. The following are generic procedures:
 - 1) Ensure all Drain Levers are in the closed (**UP**) position, then add water to each vat until it reaches a point 2” (51 mm) **BELOW** the middle line of the “E ← ” in the word **LEVEL** of the **UPPER** shortening level mark on the rear wall of the vats.

WARNING: ONLY USE A COMMERCIAL GRADE “NON-CHLORINE” BOIL-OUT COMPOUND!!


- 2) Add the amount of **BOIL-OUT COMPOUND** in each fryer vat as prescribed in the Cleaning Manual provided by the Chemical Supplier.
- 3) Turn the Toggle ON/OFF switch and, if applicable, Manual Gas valve for each fryer vat to the **ON** position; then depress the Computer ON/OFF Key to the **ON** position.

NOTE: The Drain Lever must be in the closed **UP** position to turn the computer **ON**.

- 4) Place the Computer in the **BOIL MODE** by pressing the following Computer keys in the order shown:



NOTE: **BOIL 30:00** will appear in the Computer display and the Computer will turn the Ultrafryer **ON** and **OFF** to heat and maintain the boil-out solution at 192°F (89°C).

- 5) Frequently scrub the sides, front and rear of each fryer vat with a long handled synthetic bristle scrub brush.
- 6) After the boil-out solution has “**BOILED**” for 30 minutes and the alarm sounds, press the  key to **EXIT BOIL MODE**.
- 7) Turn the Toggle ON/OFF Switch and if applicable, the Manual Gas Valve for each fryer to their **OFF** position and **CAREFULLY** dispose of the boil-out solution in each fryer in a floor drain.



NOTE: Do not use the filter pump to remove water from the vats as this will cause premature pump failure and void the pump warranty.

- 8) Use a scrubbing pad to remove carbon buildup from the top of the heat mechanism. To remove carbon buildup on the sides and bottom of the heat mechanism; slide one end of a stropping pad under each heat mechanism, grasp that end with a pair of tongs, and rock the pad up and down along the length of each heat mechanism until all encrusted material has been removed.
- 9) Rinse each fryer with hot water until the water coming out of the drain valve is clear.
- 10) Mix a solution of **ONE PART** vinegar to **25 PARTS** of water. Place this mixture into a one gallon garden pressure sprayer; and **THOROUGHLY** spray this solution onto the **SIDES, HEAT MECHANISM,** and **BOTTOM** of each fryer to neutralize the Boil-Out Compound.

NOTE: Boil-Out Compound will cause shortening to break down rapidly if it is not neutralized.

- 11) **THOROUGHLY** wipe the sides, heat mechanism, and bottom of each fryer with clean, lint-free, dry towels to remove any remaining water; then fill each fryer with **NEW** shortening following procedures on page 5 of this manual.
- 12) After the fryer has been filled with new shortening, place the computer in the **FEATURE PROGRAMMING MODE** and set the **DISPOSAL HIT COUNT (DHC #####)** to "0" to clear the **DISPOSE PROMPT** ; then press the **SET** key on the computer to exit the programming mode and return to normal operation.

INTERMEDIATE SEDIMENT FLUSH - To reduce the amount of sediment and debris build-up in vats used to cook **BATTERED CHICKEN** between filtering routines, it is recommended that the **VAT SWEEPER NOZZLE** be activated after cooking **480** pieces (10 drops of 48 pieces) of battered chicken. To perform an intermediate sediment flush; turn the Toggle ON/OFF Switch, and if applicable, the gas to the fryer vat **OFF**, and **ENSURE** the Suction Line Hose Assembly is securely connected to the filter screen **STANDPIPE** and fryer **BULKHEAD SUCTION COUPLING** as shown below.

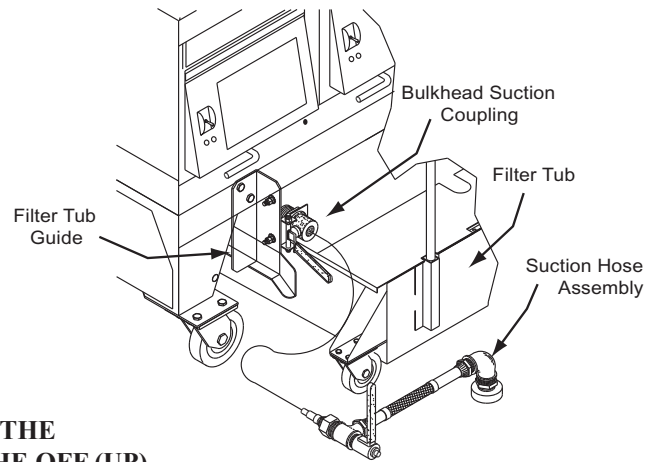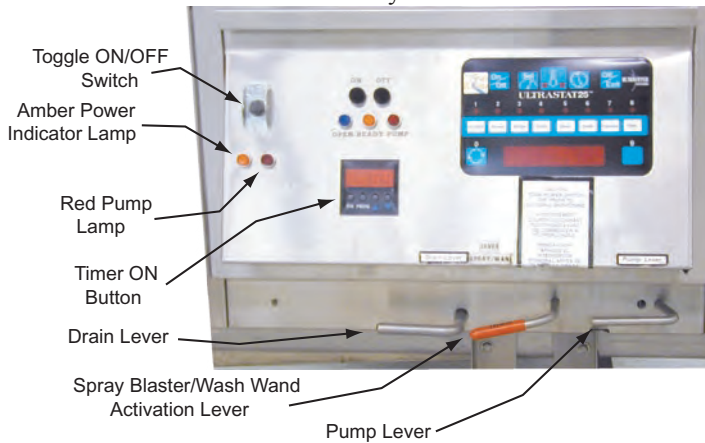


CAUTION: PRIOR TO PROCEEDING TO STEP 1 ENSURE THE PUMP LEVER ON ALL OTHER FRYER VATS ARE IN THE OFF (UP) POSITION.

<u>STEP</u>	<u>ACTION</u>	<u>RESPONSE</u>
1	Turn the Toggle ON/OFF Switch and the gas to the fryer vat OFF .	
2	Scrape ALL sides of the fryer with a scraper to loosen encrusted material.	
3	<p>SLOWLY turn the Drain Lever to the DOWN “OPEN” position, when the bottom of the filter tub is covered with about two (2) inches (51 mm) of shortening, “SLOWLY” OPEN the Drain Lever until shortening DROPS to the TOP of the heat mechanism; then,</p> <ol style="list-style-type: none"> Turn the PUMP LEVER to the DOWN “ON” position. Set the TIMER for TWO (2) minutes. <p>CAUTION: DO NOT FLUSH SHORTENING MORE THAN TWO (2) MINUTES.</p>	<ol style="list-style-type: none"> The RED “PUMP” Lamp will LIGHT. Shortening in the filter tub will be pumped back into vat through the SWEEPER nozzle, FLUSHING sediment and debris to the drain opening.
4	When the Timer sounds at the end of two (2) minutes, turn the Drain Lever to the UP “CLOSED” position.	1. Shortening in the filter tub will be returned to the vat.
5	When ALL shortening in the filter tub has been returned to the fryer vat, as indicated by the bubbling air at the rear of the vat, turn the PUMP LEVER to the UP “OFF” position.	<ol style="list-style-type: none"> RED “PUMP” Lamp will turn OFF. Check and, if applicable, add shortening to the vat until it is level with the E ← in the word LEVEL on the rear wall of the vat.
6	Repeat steps 1 to 5 to perform an Intermediate Sediment Flush on other vats used to Cook Battered Chicken	
7	<p>When all Battered Chicken vats have been flushed:</p> <ol style="list-style-type: none"> Remove the Filter Tub Assembly from beneath the fryer, clean and reassemble the filter tub assembly following the “After Filtering” procedures in the Cleaning Section on page 27. Replace the Filter Tub beneath the fryer and SECURELY connect the Suction Line Hose to the filter screen STANDPIPE and fryer BULKHEAD SUCTION COUPLING. 	

CLEANING

CLEANING - Any item of equipment operates better and lasts longer when it is kept cleaned and properly maintained, and the **ULTRAFRYER** and **FILTER TUB ASSEMBLY** are no exception. Clean the Ultrafryer daily and weekly according to the applicable Electric or Gas Ultrafryer Operations manual. Clean the **FILTER SCREEN** after Filtering Shortening and at Closing; and **THOROUGHLY** clean the **FILTER TUB ASSEMBLY** each **DAY** and **WEEK** as described below.

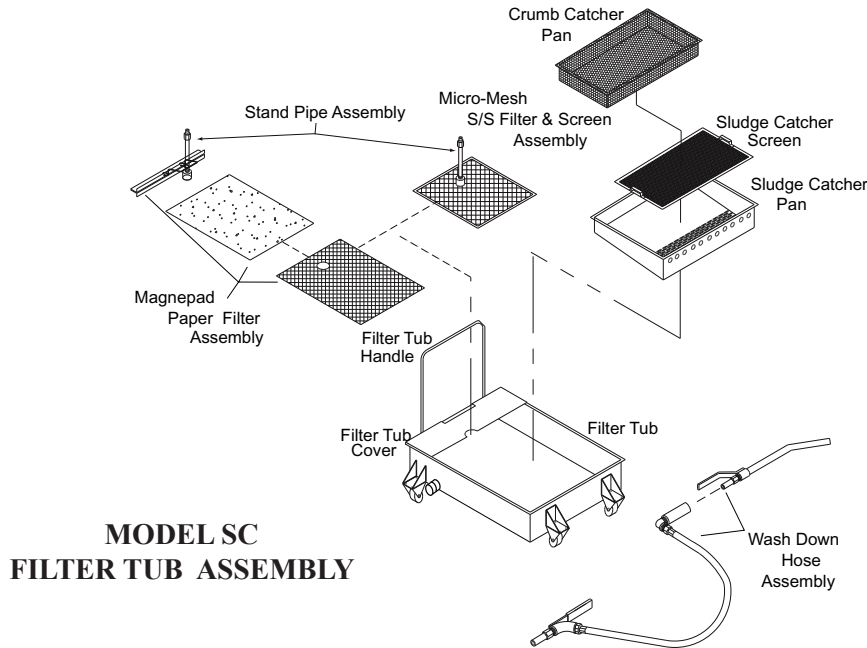

**MODEL SC
FILTER TUB ASSEMBLY**

NOTE: With the exception of the Stainless Steel Micro-Mesh Filter Screen and **OPTIONAL** Magnepad Paper Filter Assemblies, all SC Filter Tub Assemblies are identical.

A. Daily


1. Clean the Filter Machine and Filter Assembly after **FILTERING** and **AT CLOSING** as follows:

a. After Filtering Shortening:

- 1) Disassemble the Filter Machine by removing the following items in the order listed; (1) **CRUMB CATCHER PAN, SLUDGE CATCHER PAN and SCREEN**, (2) **FILTER TUB HANDLE**, (3) **COVER**, (4) **WASH DOWN HOSE**, (5) **SUCTION LINE HOSE**, and (6) **FILTER ASSEMBLY**.
- 2) Clean the Suction Line Hose and Wash Down Hose with sanitizer solution; then hang these hoses in an upright position so any shortening can drain into a container.
- 3) Discard crumb fragments in the Crumb Catcher Pan and **THOROUGHLY** clean the pan with **HOT** water and let it air dry.
- 4) Remove sludge from the Sludge Catcher Screen and Pan using a scraper and **THOROUGHLY** clean these items with **HOT** water and allow them to air dry.
- 5) Raise the Filter Assembly above the Filter Tub and let any sediment or shortening drain into the tub; then **THOROUGHLY** clean the filter assembly as follows:

a) "Micro-Mesh" Stainless Steel Filter Screen


- (1) **CAREFULLY** remove any debris from the screen using a scraper.
- (2) Remove the **STANDPIPE** and **KNURL** knob from the **FILTER SCREEN** assembly, grasp the **FINGER LOOP** on **FRAME A** and adjacent **FINGER LOOP** on **FRAME B**, **EVENLY** pull the frames apart; then **HINGE** **FRAME A** to remove it from the **FILTER SCREENS** **FIRST**.
- (3) Grasp the **FINGER LOOP** on the straight side of **FRAME B**; then **HINGE** it to remove **FRAME B** from the **FILTER SCREENS**.
- (4) Separate the **UPPER FILTER SCREEN** and **BAFFLE** from the **LOWER FILTER SCREEN**.
- (5) **CAREFULLY** clean the two frames, screens and baffle in the 3 compartment sink with hot water and allow these items to air dry. **DO NOT USE SOAP**. If necessary the channels in each frame can be cleaned with the edge of a scotch-brite pad.
- (6) Insert the **SUCTION FITTING** on the **BAFFLE** in the hole of the **UPPER FILTER SCREEN**; then place these items on top of the **LOWER FILTER SCREEN**.
- (7) **ENSURE** all sides of the **FILTER SCREEN** assembly are aligned, place the **PIN** end of **FRAME A** on the **FILTER SCREENS**, place the **CHANNEL** on the frame adjacent to the **PIN** end over the **FILTER SCREENS**; then **HINGE** the frame so the edge of the **FILTER SCREENS** are inserted in the other **CHANNEL** of **FRAME A**.

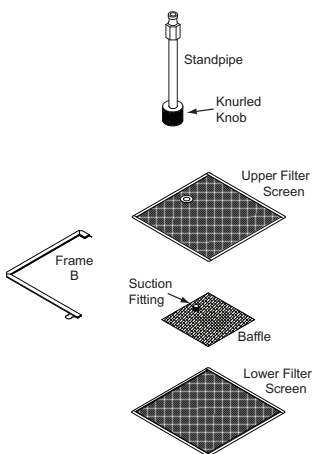

- (8) Place the **PIN** end of **FRAME B** on the **FILTER SCREENS** so the **PIN** is seated in the **CHANNEL** of **FRAME A** near the **FINGER LOOP**, place the **CHANNEL** on the frame adjacent to the **PIN** end over the edge of the **FILTER SCREENS**; then **HINGE** the frame so the edge of the **FILTER SCREENS** are inserted in the other **CHANNEL** of **FRAME B** and the **PIN** of **FRAME A** is seated in the **CHANNEL** of **FRAME B**.
- (9) Adjust **FRAME A** and **B** so both **PINS** are properly seated in the **CHANNEL** of the opposite frame; then **CAREFULLY** connect the **KNURL KNOB** and **STANDPIPE** to the **SUCTION FITTING** on the **FILTER SCREEN** assembly. **DO NOT OVERTIGHTEN!!!**
- b) “Magnepad Paper Envelope” Filter: Magnepad Paper Filter Assemblies **DO NOT** have to be **SCRAPED** after filtering shortening.
- 6) Remove any sediment and shortening in the Filter Tub using a scraper; then wipe the tub dry with paper towels.
- 7) Carefully insert the Filter Assembly in the bottom of the Filter Tub with the **STANDPIPE** centered in the handle end of the tub.


WARNING: WHEN ASSEMBLED, ENSURE THERE ARE NO FINGER LOOPS ON THE STANDPIPE SIDE OF THE FILTER.

- 8) **CAREFULLY** insert the Sludge Catcher Screen and Pan in the Filter Tub; then replace the Crumb Catcher Pan.
- 9) Connect the **FEMALE** Quick-Connect Coupling on the Suction Line Hose to the **MALE** Quick-Connect Stems on the Filter Screen **STANDPIPE**, place the Filter Tub in front of the **FILTER TUB GUIDES** beneath the **LEFT** side of the fryer, insert the Filter Tub into the fryer until it is butted against the **STOP** bracket; then, **SECURELY** connect the **MALE** Quick-Connect plug on the Suction Line Hose to the **FEMALE** Quick-Connect Coupling on the fryers Bulkhead Suction Coupling shown to the right.

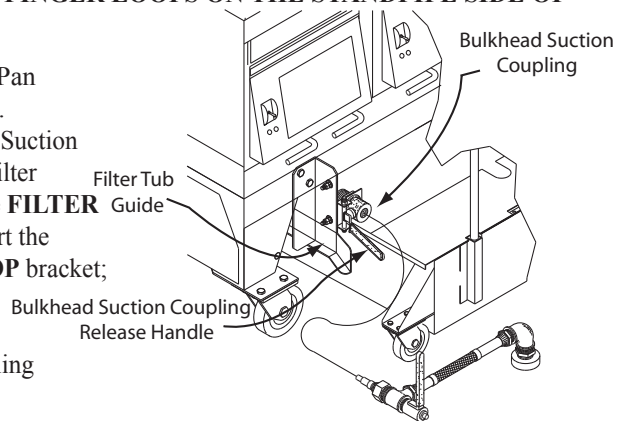


b. At Closing

- 1) Repeat **DAILY** steps A 1 a 1) thru A 1 a 5) above.
- 2) **THOROUGHLY** clean the Filter Assembly as follows:
 - a) “Micro-Mesh” s/s Filter Screen:

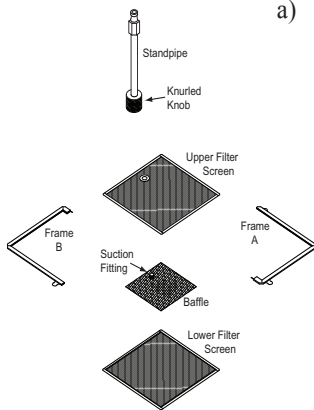

- (1) **THOROUGHLY** flush any remaining sediment from both sides of the filter screen with **HOT WATER**.
- (2) Remove the **STANDPIPE** and **KNURL** knob from the **FILTER SCREEN** assembly, grasp the **FINGER LOOP** on **FRAME A** and adjacent **FINGER LOOP** on **FRAME B**, **EVENLY** pull the frames apart; then **HINGE FRAME A** to remove it from the **FILTER SCREENS** **FIRST**.
- (3) Grasp the **FINGER LOOP** on the straight side of **FRAME B**; then **HINGE** it to remove **FRAME B** from the **FILTER SCREENS**.
- (4) Separate the **UPPER FILTER SCREEN** and **BAFFLE** from the **LOWER FILTER SCREEN**.
- (5) **CAREFULLY** clean the two frames, screens and baffle in the 3 compartment sink with hot water and allow these items to air dry. **DO NOT USE SOAP**. If necessary the channels in each frame can be cleaned with the edge of a scotch-brite pad.
- (6) Insert the **SUCTION FITTING** on the **BAFFLE** in the hole of the **UPPER FILTER SCREEN**; then place these items on top of the **LOWER FILTER SCREEN**.
- (7) **ENSURE** all sides of the **FILTER SCREEN** assembly are aligned, place the **PIN** end of **FRAME A** on the **FILTER SCREENS**, place the **CHANNEL** on the frame adjacent to the **PIN** end over the **FILTER SCREENS**; then **HINGE** the frame so the edge of the **FILTER SCREENS** are inserted in the other **CHANNEL** of **FRAME A**.
- (8) Place the **PIN** end of **FRAME B** on the **FILTER SCREENS** so the **PIN** is seated in the **CHANNEL** of **FRAME A** near the **FINGER LOOP**, place the **CHANNEL** on the frame adjacent to the **PIN** end over the edge of the **FILTER SCREENS**; then **HINGE** the frame so the edge of the **FILTER SCREENS** are inserted in the other **CHANNEL** of **FRAME B** and the **PIN** on **FRAME B** is seated in the **CHANNEL** of **FRAME A**.
- (9) Adjust **FRAME A** and **B** so other **PINS** are properly seated in the **CHANNEL** of the opposite frame; then **CAREFULLY** connect the **KNURL KNOB** and **STANDPIPE** to the **SUCTION FITTING** on the **FILTER SCREEN** assembly. **DO NOT OVERTIGHTEN!!!**
- b) “Magnepad” Envelope Filter - Remove and discard the **USED** Filter Pad Envelope, **CAREFULLY** clean the

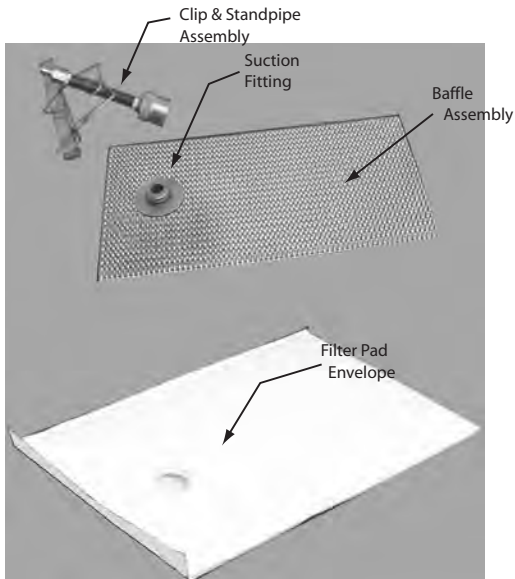

- (1) Insert the **BAFFLE** into the **FILTER PAD ENVELOPE**, when inserted properly the **SUCTION FITTING** will protrude through the hole in the pad.
- (2) Fold **FLAP** over (in the direction of the hole), securing the Baffle inside the **FILTER PAD ENVELOPE**.
- (3) **CAREFULLY**, align the **CLIP & STANDPIPE ASSEMBLY** so that the **CLIP** can secure the **FLAP** on the Envelope and the **STANDPIPE** will align over the **SUCTION FITTING** protruding through the Envelope.
- (4) Tighten the knurled **NUT** on the **STANDPIPE** to the **SUCTION FITTING** protruding through the Envelope.

- 3) Repeat **DAILY** steps A1 a 6) through steps A1 a 9) page 38.

B. WEEKLY

1. Perform the daily cleaning steps A 1 a 1) through A 1 a 5) page 37.
2. Clean the Filter Assembly as follows:
 - a) "Micro-Mesh" stainless steel filter screen:
 - 1) Disassemble the filter according to **DAILY** steps A 1 a 5) a) (1) through A 1 a 5) a) (4) and clean the two (2) frames as described in step A 1 a 5) a) (5).
 - 2) Place the upper and lower **FILTER SCREENS** in the fryer with **BOIL-OUT SOLUTION** for cleaning. **DO NOT PLACE THE BAFFLE OR STANDPIPE IN THIS SOLUTION!!!** **BOIL-OUT** the fryer vat according to instructions contained in the cleaning manual provided by your chemical supplier.
 - 3) After the filter screens have been cleaned in the Boil-Out Solution, **ENSURE** they are **THOROUGHLY** sprayed with a solution of **1 PART** vinegar to **25 PARTS** of water to **NEUTRALIZE** the boil-out solution, then allow the screens to air dry. **NOTE:** any residue of boil-out solution on the filter screens could cause the rapid break-down of the shortening.
 - 4) Reassemble the "Micro-Mesh stainless steel filter screen according to **DAILY** steps A 1 a 5) a) (6) through A 1 a 5) a) (9) page 38.
 - b) "Magnepad" Envelope Filter - Disassemble, clean, and re-assemble the "Magnepad" Filter Assembly according to **DAILY** cleaning steps A 1 b 2) b) page 38.
3. Place the **CRUMB CATCHER PAN** and **SLUDGE CATCHER SCREEN** in the fryer with the Boil-Out Solution for cleaning, and after they are cleaned, **ENSURE** they are sprayed with a solution of vinegar/water as described in **WEEKLY** step B2 a) 3) above.
4. **THOROUGHLY** clean the Filter Tub, Cover and Sludge Catcher Pan with **HOT SANITIZER SOLUTION** and allow them to air dry.
5. Re-assemble the Filter Tub according to **DAILY** steps A 1 a 6) through A 1 a 9) (pg 38).

WARNING: WHEN ASSEMBLED, ENSURE THERE ARE NO FINGER LOOPS ON THE STANDPIPE SIDE OF THE MICRO-MESH FILTER.

SERVICE AND PARTS

1. **TECHNICAL ASSISTANCE** - Contact an authorized service agent or the Customer Service Department, Ultrafryer Systems at 1-800-525-8130 for technical assistance.

2. **ORDERING INFORMATION:**

A. **REPLACEMENT PARTS** - Provide the following information when ordering replacement parts by phone, fax or mail:

Your company name and phone number
Your company purchase order number
Bill-to address
Ship-to address
Quantity desired
Part number and description of the desired-item
Your name or signature of authorized-buyer
Phone in order to: 1-800-545-9189 Ext 5029
FAX order to: 1-210-731-5099
Mail order to: Ultrafryer Systems
Order Entry Office
P.O. Box 5369
San Antonio, TX 78201
E-Mail your order to: Ultrafryerservice@afce.com



B. **TERMS** - Net 30 days for customers on open accounts. Past due balances will be charged 1 1/2% per month (18% per annum) until full balance is paid.

C. **DAMAGES** - Ultrafryer Systems is not responsible for damage occurring in transit. All deliveries must be inspected for damage to shipping containers prior to departure of the delivering carrier. Any damage must be notated on the receiving document to facilitate filing of freight claims. Carriers must be notified immediately and freight inspections must be requested from the carrier. Ultrafryer Systems can and will gladly assist you in preparing and processing of the necessary claims only if proper notification has been accomplished on the carrier delivery document. Damaged equipment and or containers must be available for the claims inspector to inspect.

D. **RETURNS** - Ultrafryer Systems cannot guarantee credit for items returned without proper authorization. All returns must have prior Ultrafryer Systems Customer Service or Warranty department approval. An assigned number will be issued by the approval authority. Please print the assigned number on all returned packages and corresponding paperwork. Returned goods are subject to a 15% restocking charge. Ultrafryer Systems is not responsible for freight charges on returned goods unless authorized by Customer Service and or Warranty personnel. Ultrafryer Systems does not receive freight collect or C.O.D. shipments.

3. **PARTS IDENTIFICATION** - Locate the part on the following sketches and note the index number i.e, 4, 7, etc; then obtain the part number and description for that index number on the right side of the page facing the sketch. Use that part number when ordering a replacement part.

PAR-2-SC / PAR-3-SC GAS FRYER COMPONENT LOCATIONS

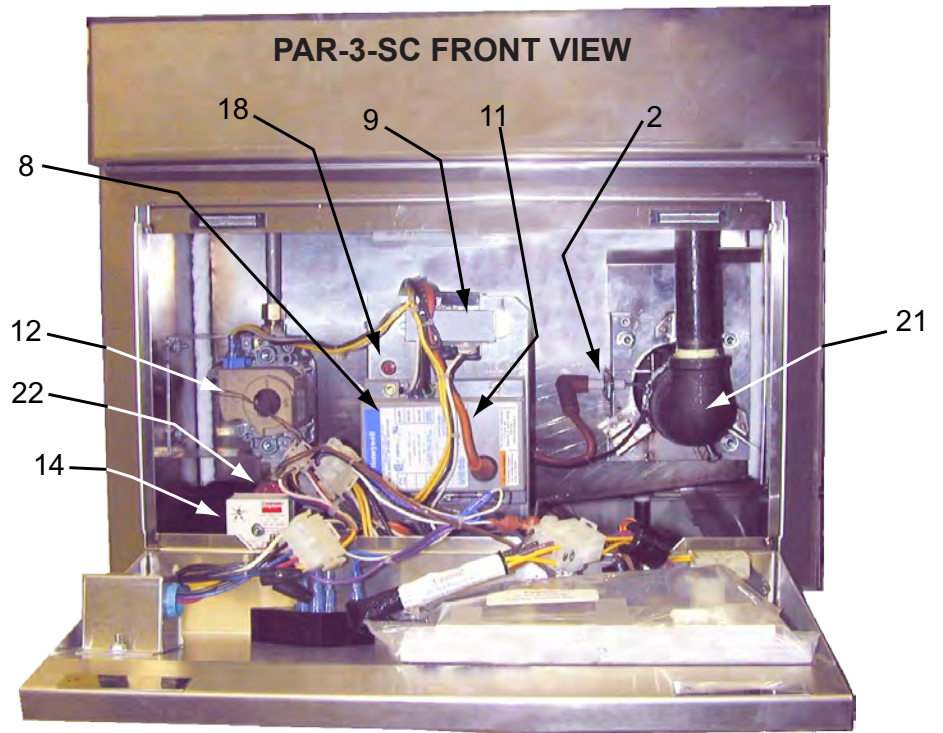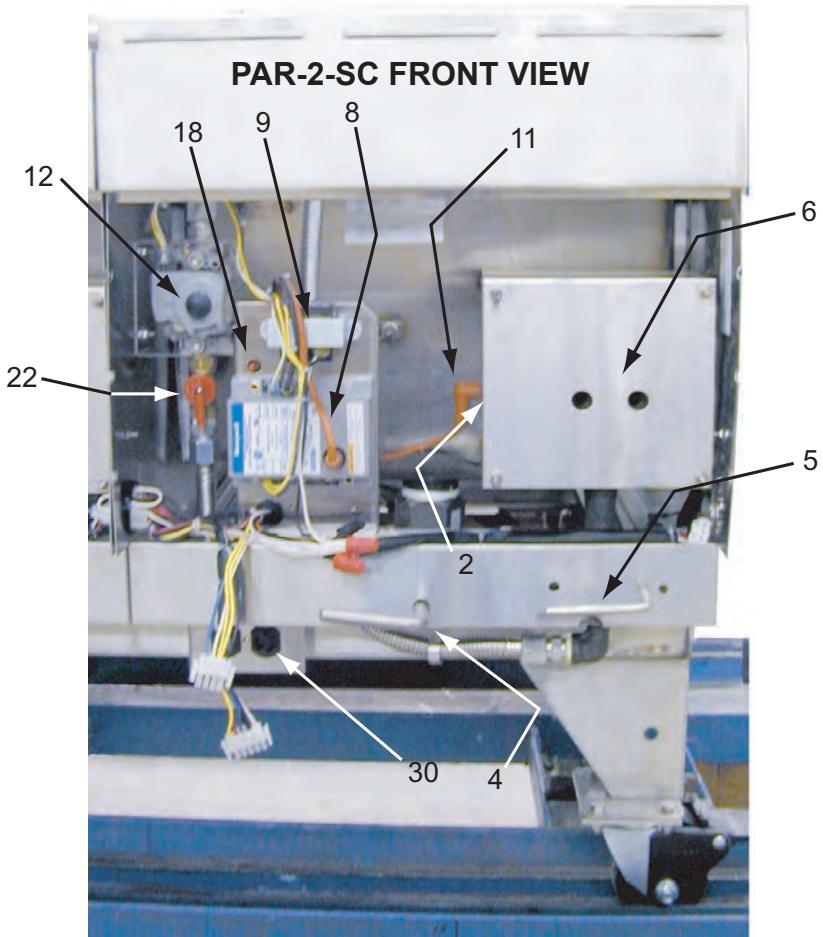

ITEM	DESCRIPTION	PN
* 1	Drain Clean-out Rod for all Par-2 & Par-3 Fryers.	12-569
2	Ignitor Spark Rod Assembly for all Par-2 Fryers. NOTE: Set Rod Gap to $\frac{5}{32}$ " (4mm) prior to installation. Ignitor Spark Rod Bracket with Ignitor Rod for all Par-3 Fryers. NOTE: Set Rod Gap to $\frac{5}{32}$ " (4mm) prior to installation.	12A043 19A738
* 3	14" (356mm) Vat w/out Deflector Grill for Par-3 Fryers. 18" (457mm) Vat w/out Deflector Grill for all Par-2 & Par-3 Fryers. 20" (508mm) Vat w/out Deflector Grill for all Par-2 & Par-3 Fryers.	22-703 22-704 22-671
4	2" (51mm) Drain Valve Lever for all Par-2 Fryers. 1 $\frac{1}{4}$ " (32mm) Drain Valve Lever for all Par-3-14 Fryers. 2" (51mm) Drain Valve Lever for all Par-3-18&20 Fryers.	12A105 12A476 12A477
5	$\frac{3}{4}$ " (19mm) Filter Valve Lever for all Par-2 Fryers. $\frac{1}{2}$ " (13mm) Filter Valve Lever for all Par-3-14 Fryers. $\frac{1}{2}$ " (13mm) Filter Valve Lever for all Par-3-18&20 Fryers.	12A106 19A615 19A617
6	Par-2-18&20 Fire Box Asy w/Interior Gaskets. For Cover order PN 19-626, order PN22A168 for Weldment Shield, and for weldment shield gaskets order PN 12A161.	19A074
* 7	RED Handle Spray Blaster/Wash Wand Activation Lever for Par-3-14 Fryers. RED Handle Spray Blaster/Wash Wand Activation Lever for Par-2-20 & Par-3-20 Fryers. RED Handle Spray Blaster/Wash Wand Activation Lever for Par-2-18 & Par-3-18 Fryers.	12A474 12A475 12A524
8	Model S 87B1008 Spark Ignitor Module for all Par-2 & Par-3 Fryers.	18-179
9	120 Volt to 24 Volt Step-Down Transformer for all Par-2 & Par-3 Fryers.	18-180
*10	Drain and Filter Valve Lever Microswitch for all Par-2 & Par-3 Fryers.	18-185
11	Model 39212S-1 Ignitor Rod Cable w/plugs for all Par-2 & Par-3 Fryers.	18-187
12	Electric Gas Combination Control Valve for all Par-2 & Par-3 Fryers. (Uses mounting bracket 19A113)	18-227
14	Delay on Make Relay for all Par-3 Fryers. (NOTE: Set Relay to "4" prior to installation.)	18A045
*15	Vat Joiner Strip for all Par-3-14 Fryer Vats. Vat Joiner Strip for all Par-2-18 & Par-3-18 Fryer Vats. Vat Joiner Strip for all Par-2-20 & Par-3-20 Fryer Vats.	19-508 19-509 19-510
*16	Cast Iron Burner for all Par-2 Fryers.	19-559
18	Hi-Limit Switch Pre-Set to trip at 400° F (204°C) for all Par-2 & Par-3 Fryers. (Order a $\frac{1}{4}$ " (5mm) Compression Fitting PN 24-247 when ordering this item.)	19A144
*19	Basket Hanger Bracket for all Par-3-14 Fryers. (NOTE 1) Basket Hanger Bracket for all Par-2-18 & Par-3-18 Fryers. (NOTE 1) Basket Hanger Bracket for all Par-2-20 & Par-3-20 Fryers. (NOTE 1)	19A949 19A950 19A951
*20	Ferrofix Nozzle Eclipse #GF-1 Burner for all Par-3 Fryers.	22A112
21	Cast Iron Venturi for all Par-3 Fryers.	22A118
22	$\frac{1}{2}$ " (13mm) ID Manual Gas Valve w/Red Handle for all Par-2 & Par-3 Fryers.	24-326
*23	Par-2-20 "Natural Gas" Orifice Plug w/#22 Drill Hole (Note 2) Par-3-20 "Natural Gas" Orifice Plug w/#7 Drill Hole (Note 2) Par-2-18 "Natural Gas" Orifice Plug w/#25 Drill Hole (Note 2) Par-3-18 "Natural Gas" Orifice Plug w/#10 Drill Hole (Note 2) Par-3-14 "Natural Gas" Orifice Plug w/#16 Drill Hole (Note 2)	24-457 24A194 24-458 24A070 24A065
*25	$\frac{1}{2}$ " (13mm) MPT x $\frac{1}{2}$ " (13mm) MPT Flexible Gas Line 36" (914mm) Long for all Par-2 & Par-3-18&20 Fryers.	24A011
*26	$\frac{1}{2}$ " (13mm) MPT x $\frac{1}{2}$ " (13mm) MPT Flexible Gas Line 24" (610mm) Long for all Par-3-14 Fryers.	24A086
*28	Medium Duty 4" (102mm) Front Caster w/Brake for all Par-2 & Par-3 Fryers.	28-015
*29	"L" Shaped Tip cleaning Brush for all Par-2 & Par-3 Fryers.	29A044
30	Nema 5-15R/L5-15R Dual Electrical Receptacle for all Par-2 & Par-3 Fryer Banks.	33A005

* NOT SHOWN


*** NOT SHOWN**

NOTES: 1) The **TOPCAP** on SC Fryers adjacent to the **TOPSIDE** Wash Wand / Spray Blaster female bulkhead coupling are wider than other **TOPCAPS** and therefore require the following **SPECIAL** Basket Hanger Brackets:


<u>SIZE VAT</u>	<u>BASKET HANGER BRACKETS</u>
14"	19B093
18"	19B094
20"	19B095

2) Par-2 and Par-3 Butane and Propane Orifice Plug Part Numbers (()'s) are as follows:

<u>FRYER</u>	<u>BUTANE</u>	<u>PROPANE</u>
Par-2-18	#43 Drill Hole (24-342)	#42 Drill Hole (24-460)
Par-2-20	#40 Drill Hole (24-461)	#39 Drill Hole (24-459)
Par-3-14	#36 Drill Hole (24A067)	#32 Drill Hole (24A066)
Par-3-18	#36 Drill Hole (24A067)	#32 Drill Hole (24A066)
Par-3-20	#30 Drill Hole (24-336)	#28 Drill Hole (24-295)

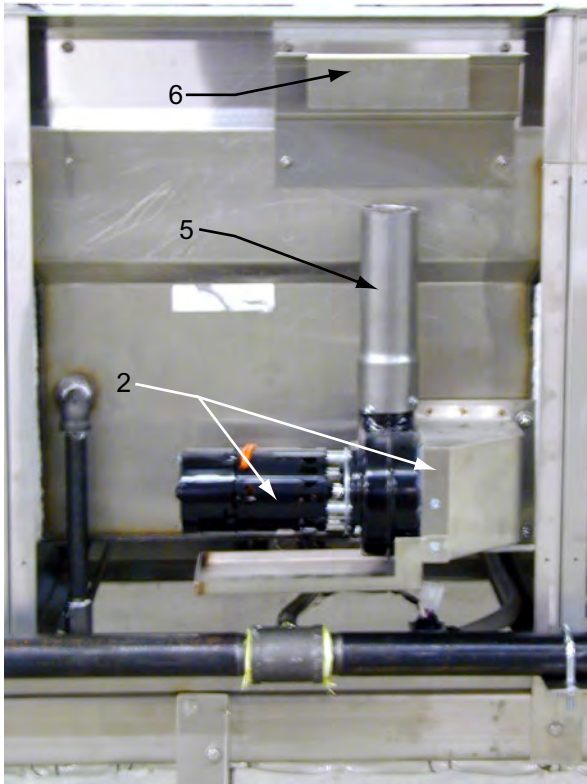

PAR-2-SC REAR VIEW

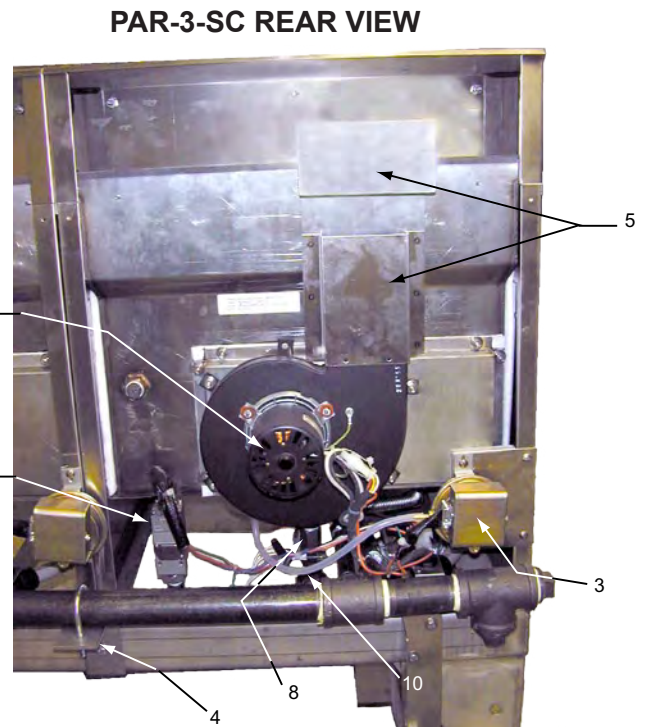

PAR-3-SC REAR VIEW

NOTE: The Air Switch Tube and Fitting (Item #10) are located on "top" of the blower on some fryers.

<u>ITEM</u>	<u>DESCRIPTION</u>	<u>PN</u>
* 1	2" (51mm) Drain Ball Valve Assembly for all Par-2 & Par-3-18&20 Fryers. (Order Gasket 22A119 when ordering this item.) 1 1/4" (32mm) Drain Ball Valve Assembly for Par-3-14 Fryer (order Gasket 22A119 when ordering this item.	12-775 12A483
2	115 Volt 60 HZ Pre-Wired Exhaust Blower Motor Kit for all Par-2 Fryers 115 Volt 60 HZ Exhaust Blower Motor Kit w/Mounting Bracket for Par-3-14 Fryers. 115 Volt 60 HZ Exhaust Blower Motor Kit w/Mounting Bracket for Par-3-18&20 Fryers.	12A021 19A547 19A548
3	Model SMD 1204 Air Pressure Switch for all Par-3 Fryers.	18A291
4	Gas Manifold Mounting Bracket for all Par-2 & Par-3 Fryers.	19A214
5	2 1/8" Dia x 7 7/8" High (54 x 200mm) Flue Tube for Par-2 Fryers. 5 3/4" x 11" High (146 x 279mm) rectangular Flue Tube with deflector for Par-3-18&20 Fryers. 5 3/4" x 8" High (146 x 208mm) rectangular Flue Tube with deflector for Par-3-14 Fryers.	19A459 19A473 19A910
6	Flue Tube Deflector for Par-2-18&20 Fryers	19A917
* 7	125 Volt 75 Watt Silicon Heater 5' (1524mm) Long for all Par-2 & Par-3 Fryers.	23-341
8	Gemini 1/2" (13mm) Pump Ball Valve for all Front Drain Par-2 and Par-3 Fryers. Appollo 3/4" (19mm) Pump Ball Valve for all Center Drain Par-2 Fryers.	24-036 24-292
* 9	Model GPV-0519 7.7 GPM (29.26 LPM) Viking Pump/Motor for all Par-2 and Par-3-18&20 Fryers. NOTE: For replacement Baldor Motor & Bracket Kit order PN 12B129 and for Pump Only order PN 34-329. Model GPV-0514 5.5 GPM (19.25 LPM) Viking Pump/Motor for all Par-3-14 Fryers. NOTE: For replacement Baldor Motor & Bracket Kit order PN 12B129 and for Pump Only order 24-339.	24A183 24A184
*10	3/16" (5mm) ID, 5/16" (8mm) OD Air Pressure Switch w/Plastic Tube rated for 500° F (260°C) for all Par-3 Fryers.	24A068
11	1/2" (13mm) S/S Pressure Port Switch for all Par-3 Fryers. ONLY	24A081
12	Medium Duty 4" (102mm) Rear Caster w/out Brake for all Par-2 & Par-3 Fryers.	28-016
13	Type SJO 16/3 Electrical Cord with 90° Molded Plug	33-048

* **NOT SHOWN**

Model Par-2 Center Drain Replacement Vats:

<u>VAT SIZE</u>	<u>VAT DEPTH</u>	<u>PN</u>
18" (457 mm)	Shallow 8" (203 mm)	12A286
18" (457 mm)	Standard 10 7/8" (276 mm)	12A320
20" (508 mm)	Standard 10 7/8" (276 mm)	12-885

Model Par-2 Front Drain Replacement Vats:


<u>VAT SIZE</u>	<u>VAT DEPTH</u>	<u>PN</u>
18" (457 mm)	Shallow 8" (203 mm)	12A319
18" (457 mm)	Standard 10 7/8" (276 mm)	12A656
20" (508 mm)	Standard 10 7/8" (276 mm)	12A658

NOTE: For Par-2-18&20 Weldment Gasket Kit (7 items) Order 12A161.


Model Par-3 Front Drain Replacement Vats:

<u>VAT SIZE</u>	<u>VAT DEPTH</u>	<u>PN</u>
14" (356 mm)	Standard 8 7/8" (225 mm)	12A655
18" (457 mm)	Shallow 8" (203 mm)	(Note)
18" (457 mm)	Standard 10 15/16" (278 mm)	12A657
20" (508 mm)	Standard 10 15/16" (278 mm)	(Note)

NOTE: Special Order from Customer Service; call 1-800-525-8130 for information.

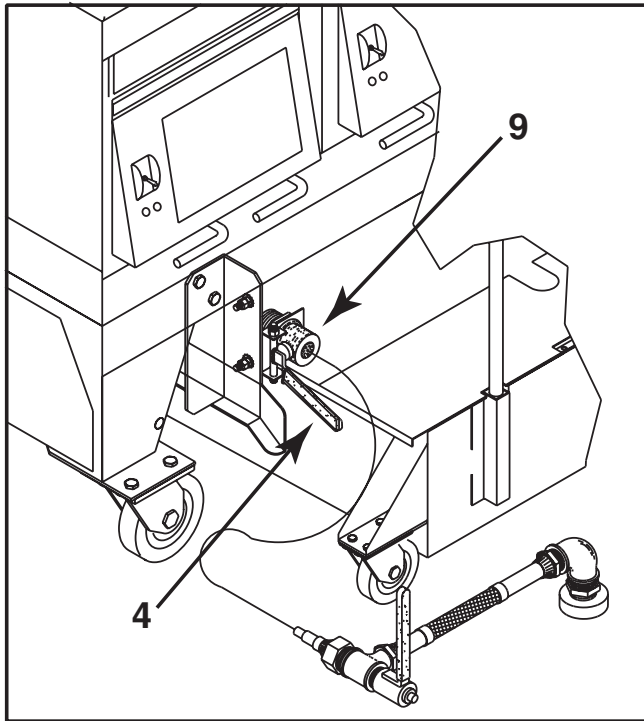


BULKHEAD SUCTION COUPLING

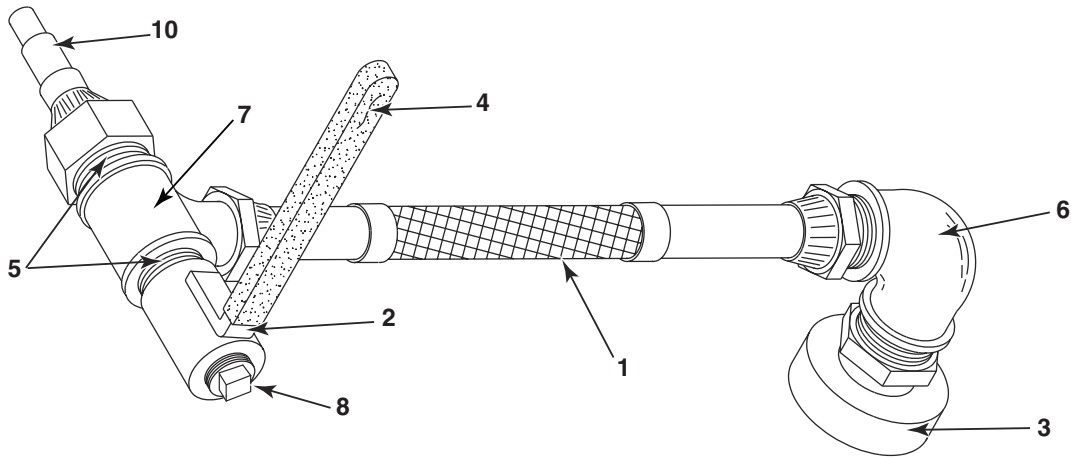


**SUCTION HOSE ASSEMBLY
PN 12A912**

ITEM	DESCRIPTION	PN
1	NSF APPROVED ½" (13 mm) x 10½" (267 mm) Long, Food Grade wire reinforced Hose w/Fittings for all Par-2 & Par-3 Fryers	12A276
2	Suction Line Hose Handle Assembly	19A932
3	Female Quick-Connect Fitting	22-677
4	Cool Handle II Grip	22-734
5	½" (13 mm) Closed Black Iron Nipple	24-003
6	⅜" (10 mm) x 90° w/½" (13 mm) NPT Internal Threads Black Iron Street Elbow	24-376
7	½" x ½" x ½" (13 x 13 x 13 mm) Black Iron Tee	24A083
8	½" (13 mm) Black Iron Square Head Plug	24A084
9	½" (13 mm) FPT S/S Female Bulkhead Coupling w/raised Push Button Release	24A157
10	½" (13 mm) FPT x 2⅞" (73 mm) Long S/S In-Line Male Plug	24A160

PAR-2-SC / PAR-3-SC TEMPERATURE CONTROL ACCESS PANELS

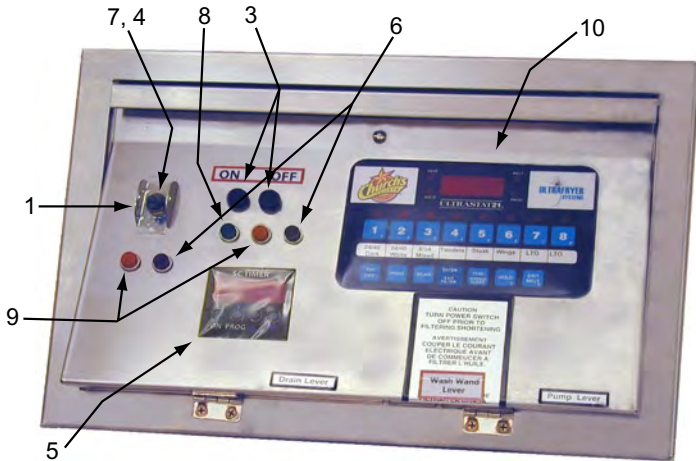

PANEL WITH DIGITAL TIMER

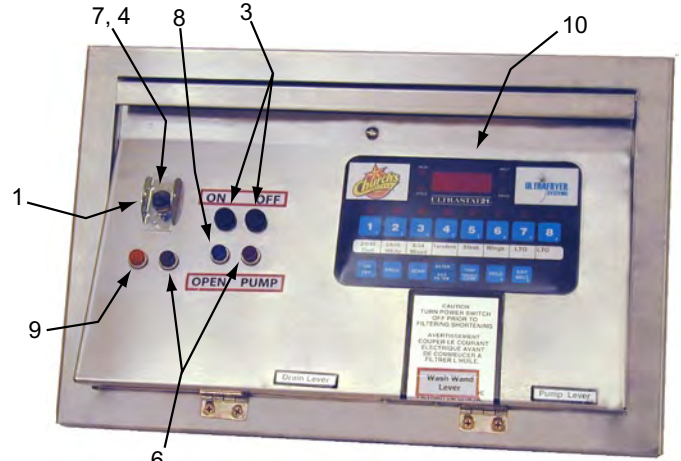

PANEL WITHOUT DIGITAL TIMER


<u>ITEM</u>	<u>DESCRIPTION</u>	<u>PN</u>
1	On/Off Toggle Switch Guard for all Par-2 & Par-3 Fryers.	18-129
*2	120 Volt Control Relay for all Par-2 & Par-3 Fryers.	18A020
3	120 Volt Momentary Push Button Switch for all Par-2 & Par-3 Fryers.	18A054
4	120 Volt 6 Amp SPDT Toggle ON/OFF Switch for all Par-2 & Par-3 Fryers.	18A287
5	125 Volt Model T-10R Digital SC Timer for some Par-2 & Par-3 Fryers.	21A269
6	125 Volt 1/3 Watt Snaplight w/RED Lens for all Par-2 & Par-3 Fryers.	23-362
7	Toggle ON/OFF Switch Protective Boot for all Par-2 & Par-3 Fryers.	23-402
8	125 Volt 1/3 Watt Snaplight w/BLUE Lens for all Par-2 & Par-3 Fryers.	23A054
9	125 Volt 1/3 Watt Snaplight w/AMBER Lens for all Par-2 & Par-3 Fryers.	23A056
10	ULTRASTAT COOKING COMPUTER Ultrastat 21 Cooking Computer (Uses Temperature Probe 18A006) Ultrastat 25 Cooking Computer (Uses Temperature Probe 18A006)	Note Note

*** NOT SHOWN**

NOTE: To obtain a replacement “PROGRAMMED” Ultrastat Cooking Computer contact the Customer Service Department at **1-800-525-8130** and provide the following information:

TYPE STORE: CHURCHS, POPEYES COMPANY, POPEYES FRANCHISE, ETC.
TYPE FRYER: ELECTRIC OR GAS
PRODUCT: CHICKEN, FRENCH FRIES, ETC.

PAR-2-SC / PAR-3-SC FILTER TUB ASSEMBLY
PN 11A830 w/Micro-Mesh Filter - PN 11A882 w/Magnepad Filter

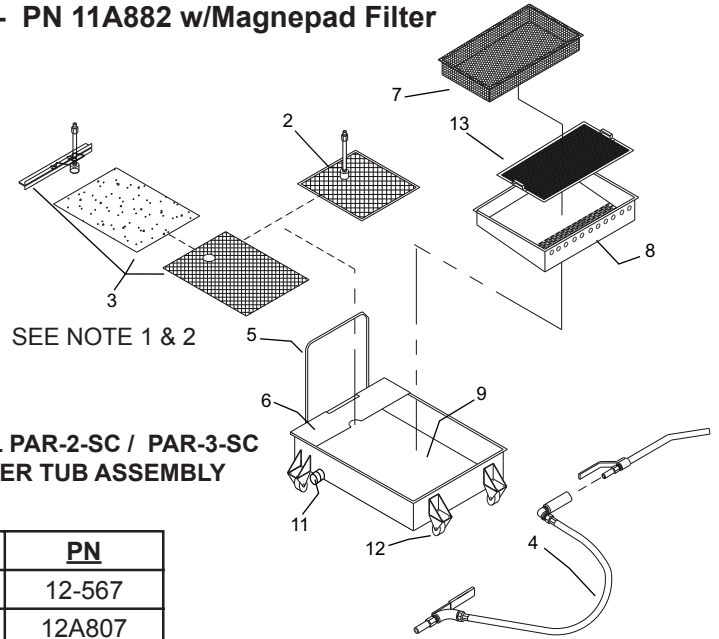


ITEM	DESCRIPTION	PN
* 1	Filter tub Scraper	12-567
2	Micro-Mesh S/S Filter Assembly (Note 1)	12A807
3	Magnepad Paper Filter Assembly (Note 2)	12A813
4	Par-2 & Par-3 Wash Down Hose Assembly	12A850
5	Filter Tub Handle	19-423
6	Filter Tub Cover	19A481
7	Crumb Catcher Pan	19A796
8	Sludge Catcher Pan	19A797
9	Universal Filter Tub	19A801
*10	1¼ " (32 mm) Boil-out Drain Ball Valve (Optional)	24A069
11	1¼ " (32 mm) Black Iron Pipe Cap	24A152
12	Medium Duty Caster	28A005
13	Sludge Catcher Screen	29A045

* **NOT SHOWN**


Notes: 1) Micro-Mesh S/S Filter PN 12A807 is provided with Filter Tub Assembly PN 11A830.

2) Magnepad Paper Filter Assembly PN 12A813 is provided with Filter Tub Assembly PN 11A882

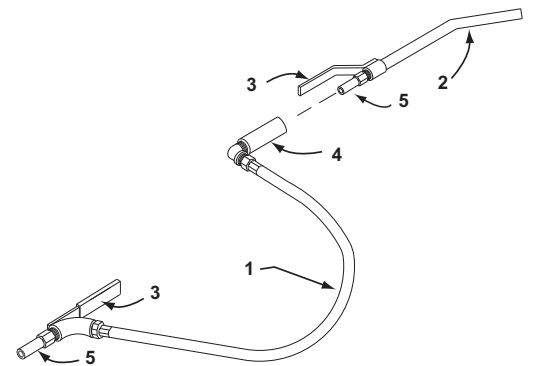

ITEM	DESCRIPTION	PN
1	6 ft (1829mm) Wash Down Hose w/Fittings	12-541
2	Par-2 & Par-3 Wash Down Handle & Nozzle	12A852
3	Cool II Handle	22-734
4	½" (13 mm) Female S/S Locking Seal Coupling	24A158
5	½" (13 mm) Male S/S Locking Seal Plug	24A160


MICRO MESH FILTER SCREEN ASSEMBLY PN 12A807

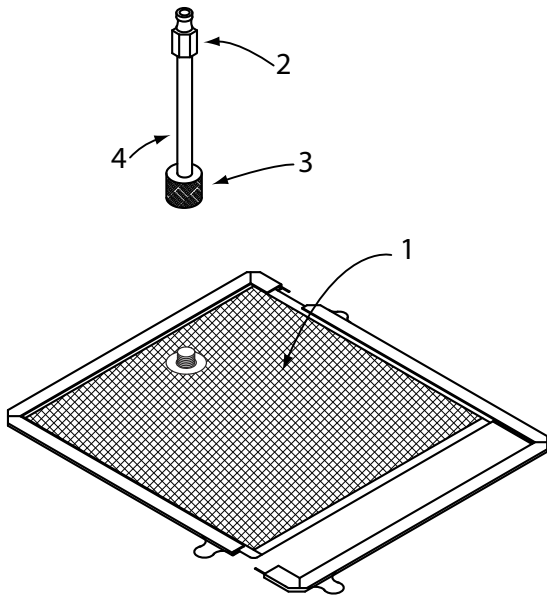

ITEM	DESCRIPTION	PN
1	Micro Mesh Filter Screen (see exploded view)	21A279
2	3/8" (10 mm) NPT Male Stem Quick-Connect Fitting	22-676
3	Top Compression Cap (Knurl Knob)	24-369
4	3/8" (10 mm) x 7" (178 mm) S/S Nipple	24-471


**NOTE: USED WITH FILTER TUB ASSEMBLY
PN 11A830.**

EXPLODED VIEW

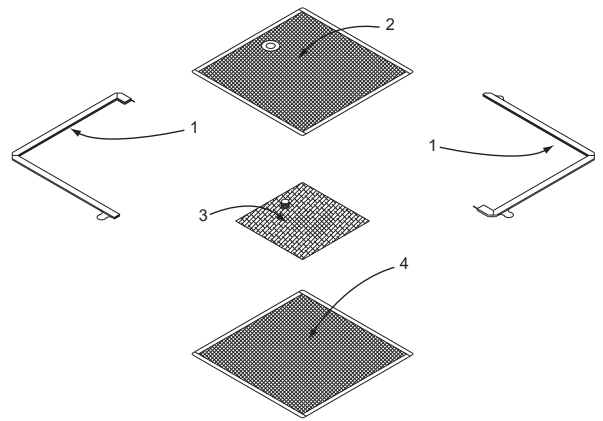


ITEM	DESCRIPTION	PN
1	Filter Screen Frame Set	22A280
2	Upper Filter Screen	21A281
3	Baffle w/suction line fitting	21A282
4	Lower Filter Screen	21A274

MAGNEPAD FILTER ASSEMBLY PN 12A813

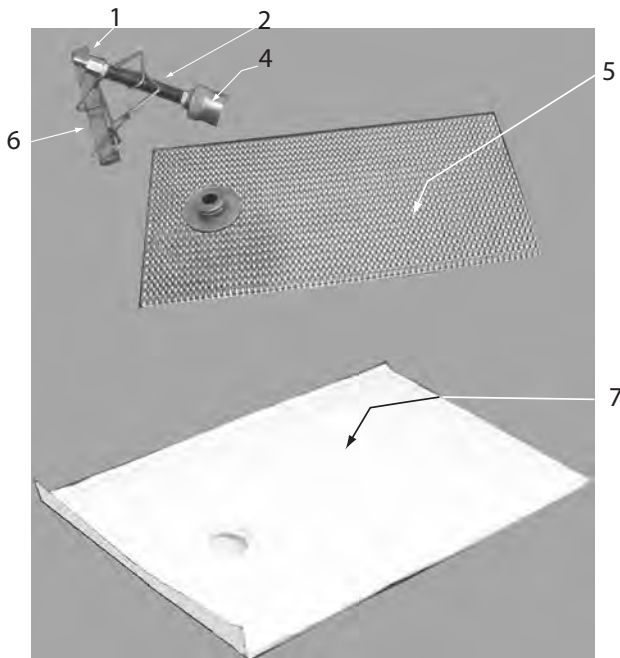

ITEM	DESCRIPTION	PN
1	3/8" (10mm) NPT Quick-Connect Male Stem	22-676
2	3/8" (10mm) x 7" (178mm) S/S Nipple	24-471
3	23 1/2" (597mm) x 30 1/2" (775mm) Baffle Kit (consisting of items 4,5, & 6)	29A055
4	Top Compression Cap (Knurl Knob)	24A153
5	21 1/2" (546mm) x 29" (737mm) Baffle	29A049
6	23 1/2" (597mm) Standpipe Clip	29A051
7	23 1/2" (597mm) x 30 1/2" (775mm) Filter Pad	29A047
*8	Case of 30 Filter Pads	29A053


* NOT SHOWN

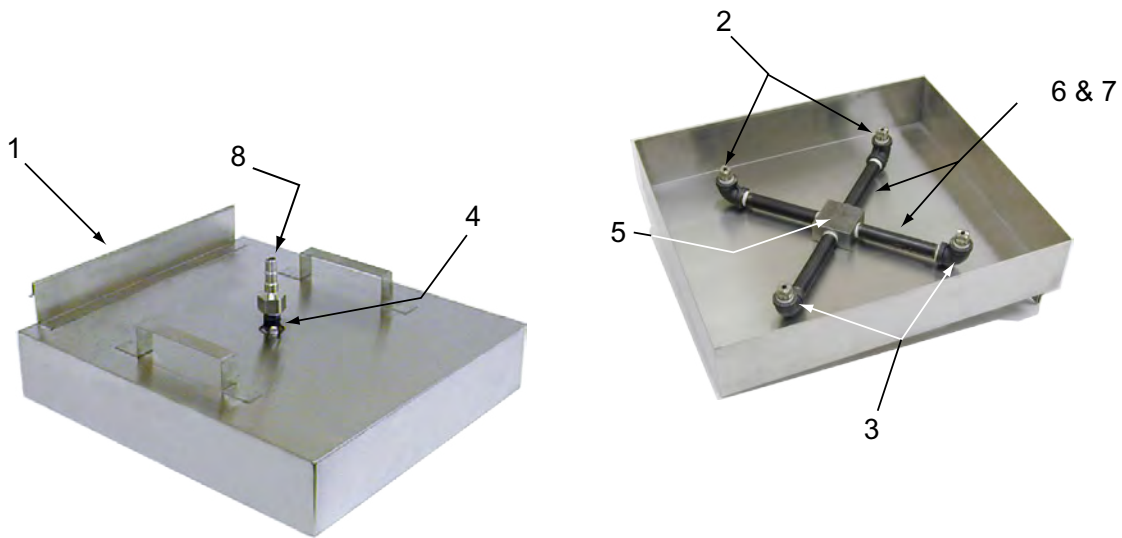

ITEM	DESCRIPTION	PN
1	Blaster, Spray 18½ x 20⅝" (470 x 524 mm) for 20" (508 mm) Par-2-SC/Par-3-SC Fryer Vat.	12A849
	Blaster, Spray 18¾ x 16⅞" (476 x 421 mm) for 18" (457 mm) Par-2-SC/Par-3-SC Fryer Vat.	12A991
	Blaster, Spray 13½ x 14" (343 x 356 mm) for 14" (356 mm) Par-2-SC/Par-3-SC Fryer Vat.	12A990
2	Nozzle, Spray ½ HH - SS36SQ (all versions)	22A111
3	Elbow, ½" (13 mm) x 90° Black Iron (all versions)	24-007
4	Nipple ½" x 2" (13 mm x 51 mm) Black Iron (all versions)	24-272
5	Manifold, 5 Way Crossover ½" Black Iron (all versions)	24A082
6	Nipple ½" x 5¼" (13 mm x 133 mm) Black Iron for 14" (356 mm) Spray Blaster PN 12A990	24A100
7	Nipple ½" x 5¾" (13 mm x 146 mm) Black Iron for 18/20" (457/508mm) Spray Blaster PN 12A990	24A101
8	Plug, Male S/S In Line ½" (13 mm) FPT 1½" (38 mm) Diameter x 2⅞" (73 mm) long	24A160

WIRING DIAGRAM

WIRING DIAGRAM - Since minor wiring changes may occur in the future, **USE** the diagram pasted to the fryer for trouble-shooting a fryer.

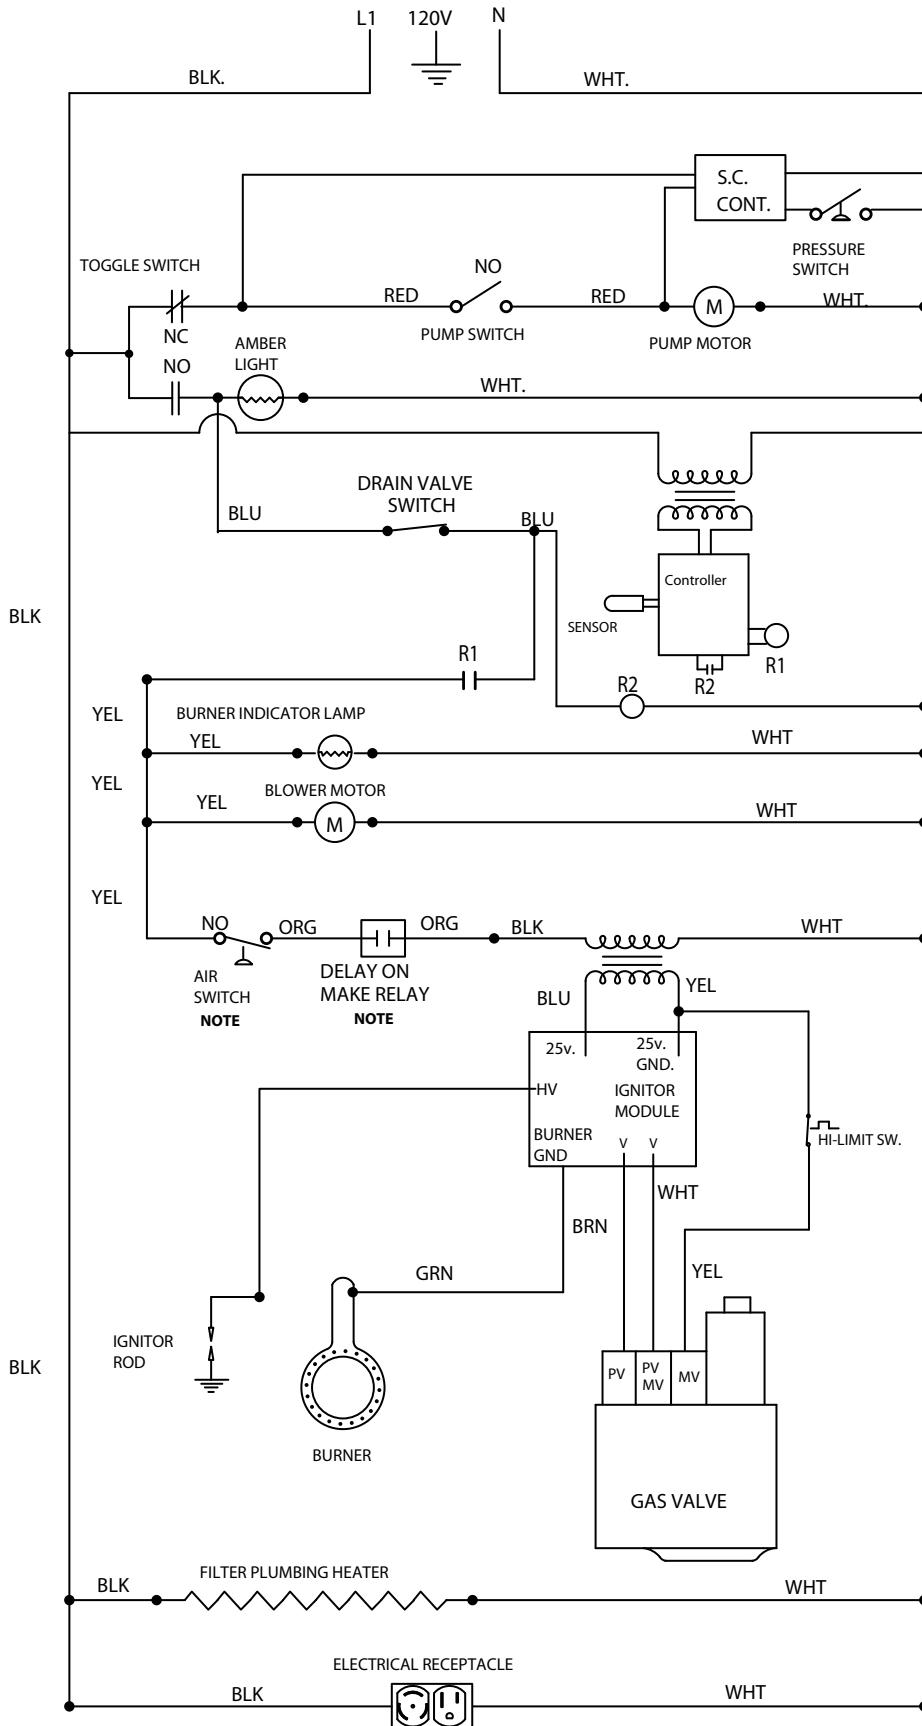

NOTE: This diagram is identical for a Par-2-SC except a Par-2-SC **DOES NOT** have a Delay-On-Make Relay and is equipped with a **CENTRIFUGAL** switch not an Air Switch.

**PAR-3-SC GAS FRYER
WIRING DIAGRAM**